


Washer-Extractor

Pocket Hardmount

Refer to page 7 for Model Numbers

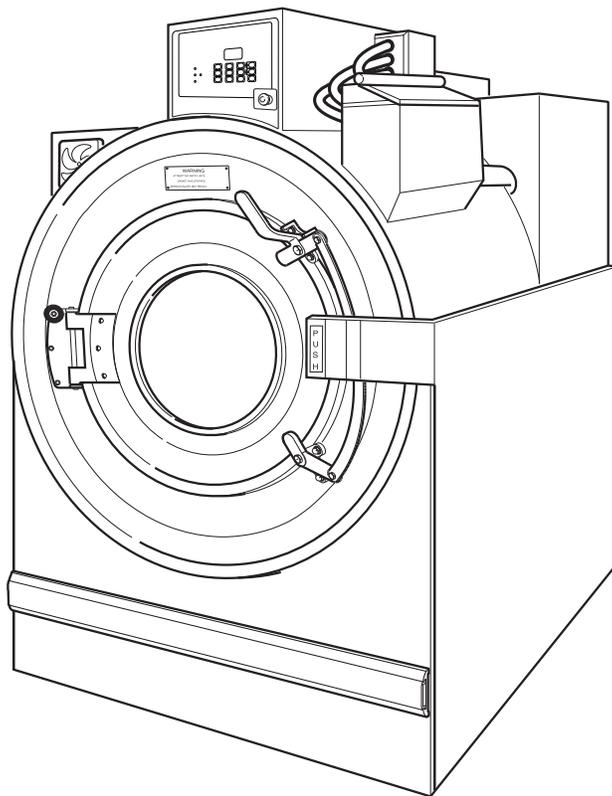

PHM1414C

— Troubleshooting —

Table of Contents

Safety Information	2
Explanation of Safety Messages.....	2
General Safety Precautions.....	2
Important Safety Instructions	3
Safety Decals	5
Operator Safety.....	5
Introduction	6
Customer Service.....	6
Nameplate Location.....	6
Model Identification	7
Theory of Operation	8
Starting the Machine.....	8
Fill.....	8
Supply	8
Wash	8
Drain	8
Extract.....	8
Troubleshooting	9
1. Machine Will Not Start Cycle.....	10
2. Door Will Not Unlock at End of the Cycle.....	12
3. No External Supplies	14
4. Excessive Vibration and/or Noise During Spin (Drawing 1 of 2)16	
5. Machine Does Not Fill with Water	18
6. No Display	20
7. No Outputs	22
8. Excessive Cycle Time.....	24
9. No Keypad Function	25
10. Abnormal Operation	26
11. No High Extract	28
12. No Extract (F and V-speed Models)	29
13. No Extract (2 Speed Models).....	31
14. No Basket Rotation (2 Speed Models).....	33
15. No Rotation with Drive Fault.....	35
16. No Rotation without Drive Fault	36
17. EFS Error – Fixed Speed Models	37
18. EFS Error – Variable Speed Models.....	39
19. Heat Error (Machines with Auxiliary Heat Only)	41
20. Control Will Not Allow PDA to Download a Machine Cycle it is Currently Running.....	43

© Copyright 2010, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Safety Information

Explanation of Safety Messages

Throughout this manual and on machine decals, you will find precautionary statements (“DANGER,” “WARNING,” and “CAUTION”) followed by specific instructions. These precautions are intended for the personal safety of the operator, user, servicer, and those maintaining the machine.

	DANGER
Danger indicates the presence of a hazard that will cause severe personal injury, death or substantial property damage if the danger is ignored.	

	WARNING
Warning indicates the presence of a hazard that can cause severe personal injury, death or substantial property damage if the warning is ignored.	

	CAUTION
Caution indicates the presence of a hazard that will or can cause minor personal injury or property damage if the caution is ignored.	

Additional precautionary statements (“IMPORTANT” and “NOTE”) are followed by specific instructions.

IMPORTANT: The word “IMPORTANT” is used to inform the reader of specific procedures where minor machine damage will occur if the procedure is not followed.

NOTE: The word “NOTE” is used to communicate installation, operation, maintenance or servicing information that is important but not hazard related.

General Safety Precautions

In the interest of safety, some general precautions relating to the operation of this machine follow.

	WARNING
<ul style="list-style-type: none">• Failure to install, maintain and/or operate this product according to the manufacturer’s instructions may result in conditions which can produce serious injury, death and/or property damage.• Do not repair or replace any part of the product or attempt any servicing unless specifically recommended or published in this Service Manual and unless you understand and have the skills to carry out the servicing.• Whenever ground wires are removed during servicing, these ground wires must be reconnected to ensure that the product is properly grounded and to reduce the risk of fire, electric shock, serious injury or death.	
W006R2	

	WARNING
<p>To reduce the risk of electric shock, fire, explosion, serious injury or death:</p> <ul style="list-style-type: none">• Disconnect electric power to the washer-extractor before servicing.• Never start the washer-extractor with any guards/panels removed.• Whenever ground wires are removed during servicing, these ground wires must be reconnected to ensure that the washer-extractor is properly grounded.	
W460	

	WARNING
Repairs that are made to your products by unqualified persons can result in hazards due to improper assembly or adjustments subjecting you, or the inexperienced person making such repairs, to the risk of serious injury, electrical shock, or death.	
W007	

	WARNING
<p>If you or an unqualified person perform service on your product, you must assume the responsibility for any personal injury or property damage which may result. The manufacturer will not be responsible for any injury or property damage arising from improper service and/or service procedures.</p>	
W008	

Always contact your dealer, distributor, service agent or the manufacturer about any problems or conditions you do not understand.

Important Safety Instructions

	WARNING
<p>To reduce the risk of fire, electric shock, serious injury or death to persons when using your washer, follow these basic precautions:</p>	
W023	

1. Read all instructions before using the washer.
2. Refer to the GROUNDING INSTRUCTIONS in the INSTALLATION manual (supplied with your washer) for the proper grounding of the washer.
3. Do not wash textiles that have been previously cleaned in, washed in, soaked in or spotted with gasoline, kerosene, waxes, cooking oils, dry-cleaning solvents or other flammable or explosive substances. They give off vapors that could ignite or explode.
4. Do not add gasoline, dry-cleaning solvents or other flammable or explosive substances to the wash water. These substances give off vapors that could ignite or explode.
5. Under certain conditions, hydrogen gas may be produced in a hot water system that has not been used for two weeks or more. HYDROGEN GAS IS EXPLOSIVE. If the hot water system has not been used for such a period, before using a washer, turn on all hot water faucets and let the water flow from each for several minutes. This will release any accumulated hydrogen gas. The gas is flammable. Do not smoke or use an open flame during this time.
6. Do not allow children to play on or in a washer. Close supervision of children is necessary when the washer is used near children.
7. Before the washer is removed from service or discarded, remove the door to the washing compartment.
8. Do not reach into the washer if the wash drum is moving.
9. Do not install or store the washer where it will be exposed to water and/or weather.
10. Do not tamper with the controls.
11. Do not repair or replace any part of the washer or attempt any servicing unless specifically recommended in the user-maintenance instructions or in published user-repair instructions that the user understands and has the skills to carry out.
12. To reduce the risk of an electrical shock or fire, DO NOT use an extension cord or an adapter to connect the washer to an electrical power source.
13. Use the washer only for its intended purpose, washing clothes.
14. Never wash machine parts or automotive parts in the machine. This could result in serious damage to the basket.
15. ALWAYS disconnect the washer from its electrical supply before attempting any service.
16. Install the washer according to the INSTALLATION INSTRUCTIONS. All connections for water, drain, electrical power and grounding must comply with local codes and, when required, be made by licensed personnel.
17. To reduce the risk of fire, textiles which have traces of any flammable substances such as vegetable oil, cooking oil, machine oil, flammable chemicals, thinner, etc. or anything containing wax or chemicals such as in mops or cleaning cloths, must not be put into the washer. These flammable substances may cause the fabric to ignite.
18. Do not use fabric softeners or products to eliminate static unless recommended by the manufacturer of the fabric softener or product.
19. Keep the washer in good condition. Bumping or dropping the washer can damage its safety features. If this occurs, have the washer checked by a qualified service person.

Safety Information

20. If the supply cord is damaged, it must be replaced by a special cord or assembly available from the manufacturer or its service agent.
21. Be sure that water connections have a shut-off valve and that fill hose connections are tight. CLOSE the shut-off valves at the end of each wash day.
22. The loading door MUST BE CLOSED any time the washer is to fill, tumble or spin. DO NOT bypass the loading door switch and permit the washer to operate with the loading door open.
23. Always read and follow the manufacturer's instructions on packages of laundry and cleaning aids. Heed all warnings and precautions. To reduce the risk of poisoning or chemical burns, keep them out of the reach of children at all times (preferably in a locked cabinet).
24. Always follow the fabric care instructions supplied by the textile manufacturer.
25. Never operate the washer with any guards and/or panels removed.
26. DO NOT operate the washer with missing or broken parts.
27. DO NOT bypass any safety devices.
28. Failure to install, maintain and/or operate this washer according to the manufacturer's instructions may result in conditions that can produce bodily injury and/or property damage.

NOTE: The WARNING and IMPORTANT SAFETY INSTRUCTIONS appearing in this manual are not meant to cover all possible conditions and situations that may occur. Common sense, caution and care must be exercised when installing, maintaining and operating the washer.

Any problems or conditions not understood should be reported to the dealer, distributor, service agent or the manufacturer.

	WARNING
<p>This machine must be installed, adjusted, and serviced by qualified electrical maintenance personnel familiar with the construction and operation of this type of machinery. They must also be familiar with the potential hazards involved. Failure to observe this warning may result in personal injury and/or equipment damage, and may void the warranty.</p>	
<small>SW004</small>	

IMPORTANT: Ensure that the recommended clearances for inspection and maintenance are provided. Never allow the inspection and maintenance space to be blocked.

	WARNING
<p>Install the machine on a level floor of sufficient strength. Failure to do so may result in conditions which can produce serious injury, death and/or property damage.</p>	
<small>W703</small>	

	CAUTION
<p>Be careful around the open door, particularly when loading from a level below the door. Impact with door edges can cause personal injury.</p>	
<small>SW025</small>	

	WARNING
<p>Never touch internal or external steam pipes, connections, or components. These surfaces can be extremely hot and will cause severe burns. The steam must be turned off and the pipe, connections, and components allowed to cool before the pipe can be touched.</p>	
<small>SW014</small>	

Safety Decals

Safety decals appear at crucial locations on the machine. Failure to maintain legible safety decals could result in injury to the operator or service technician.

To provide personal safety and keep the machine in proper working order, follow all maintenance and safety procedures presented in this manual. If questions regarding safety arise, contact the manufacturer immediately.

Use manufacturer-authorized spare parts to avoid safety hazards.

Operator Safety

	WARNING
<p>NEVER insert hands or objects into basket until it has completely stopped. Doing so could result in serious injury.</p>	
SW012	

To ensure the safety of machine operators, the following maintenance checks must be performed daily:

1. Prior to operating the machine, verify that all warning signs are present and legible. Missing or illegible signs must be replaced immediately. Make certain that spares are available.
2. Check door interlock before starting operation of the machine:
 - a. Attempt to start the machine with the door open. The machine should not start with the door open.
 - b. Close the door without locking it and attempt to start the machine. The machine should not start with the door unlocked.
 - c. Close and lock the door and start a cycle. Attempt to open the door while the cycle is in progress. The door should not open.

If the door lock and interlock are not functioning properly, call a service technician.
3. Do not attempt to operate the machine if any of the following conditions are present:
 - a. The door does not remain securely locked during the entire cycle.
 - b. Excessively high water level is evident.
 - c. Machine is not connected to a properly grounded circuit.

Do not bypass any safety devices in the machine.

	WARNING
<p>Never operate the machine with a bypassed or disconnected balance system. Operating the machine with severe out-of-balance loads could result in personal injury and serious equipment damage.</p>	
SW039	

Introduction

Customer Service


Alliance Laundry Systems is not responsible for personal injury or property damage resulting from improper service. Review all service information before beginning repairs.

If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name of the nearest authorized parts distributor.

For technical assistance, call either of these numbers (920) 748-3121 Ripon, Wisconsin or +32 56 41 20 54 Wevelgem, Belgium.

Nameplate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on nameplate(s) as shown.

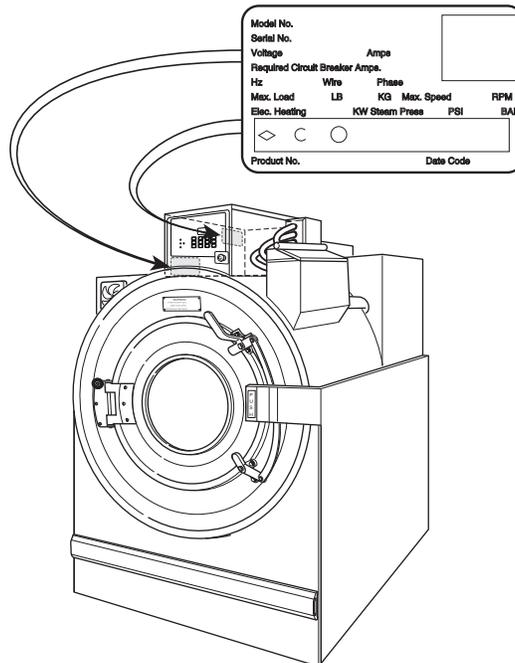

PHM2102S

Model Identification

Information in this manual is applicable to these washer-extractor models:

UWL035K12	UWN080K1M
UWL035K1L	UWN080K1V
UWL035K1M	UWN100K1M
UWL060K12	UWN100K1V
UWL060K1L	UWN125K1M
UWL060K1M	UWN125K1V
UWL080K1M	UWU035K12
UWL100K1M	UWU035K1L
UWL125K1M	UWU035K1M
UWN035K12	UWU060K12
UWN035K1L	UWU060K1L
UWN035K1M	UWU060K1M
UWN060K12	UWU080K1M
UWN060K1L	UWU100K1M
UWN060K1M	UWU125K1M
UWN060K1V	

Theory of Operation

Starting the Machine

The door lock will not allow a cycle to be started until the door has been closed.

Fill

The operator selects a cycle and starts the machine. Water enters the machine through water valves that are controlled by the microcomputer. As water fills the basket, a column of air is trapped in a pressure bulb and hose. The air pressure continues to increase as the basket fills with water. When the desired water level is reached, the water level switch triggers the microcomputer and the water valves turn off.

On designs 1 and 2, vacuum breaker installed in the inlet plumbing or a shell overflow and air gap prevents the backflow of water.

Supply

The operator can either connect external liquid supplies to the machine or fill the supply dispenser with liquid or dry supplies. The supply dispenser's nozzles flush the compartments with water at the appropriate times throughout a cycle.

Wash

The basket includes ribs that lift the laundry from the wash water. The laundry then tumbles back into the bath.

1 dual-speed motor drives the basket's shaft with a V-belt.

UW washer-extractors use two flange-type bearings that are bolted to the frame.

Drain

UW washer-extractors use a normally open gravity-type drain system. No pump is used. When the drain valve opens, the perforated basket allows water to drain from it.

In the event of a power failure, the drain valve will open automatically and the machine will drain.

This model washer-extractor includes a single drain valve.

Extract

A final high-speed extract step removes water from the load, which maximizes drying efficiency.

The door lock system will not allow the door to be opened until the cycle has finished.

Troubleshooting




WARNING

To reduce the risk of electrical shock, fire, explosion, serious injury or death:

- **Disconnect electrical power to the washer-extractor before servicing it.**
- **Close the gas shut-off valve to the washer-extractor (when applicable) before servicing it.**
- **Never start the washer-extractor with any guards/panels removed.**
- **Whenever ground wires are removed during servicing, these ground wires must be reconnected to ensure that the washer-extractor is properly grounded.**


W461R1

1. Machine Will Not Start Cycle

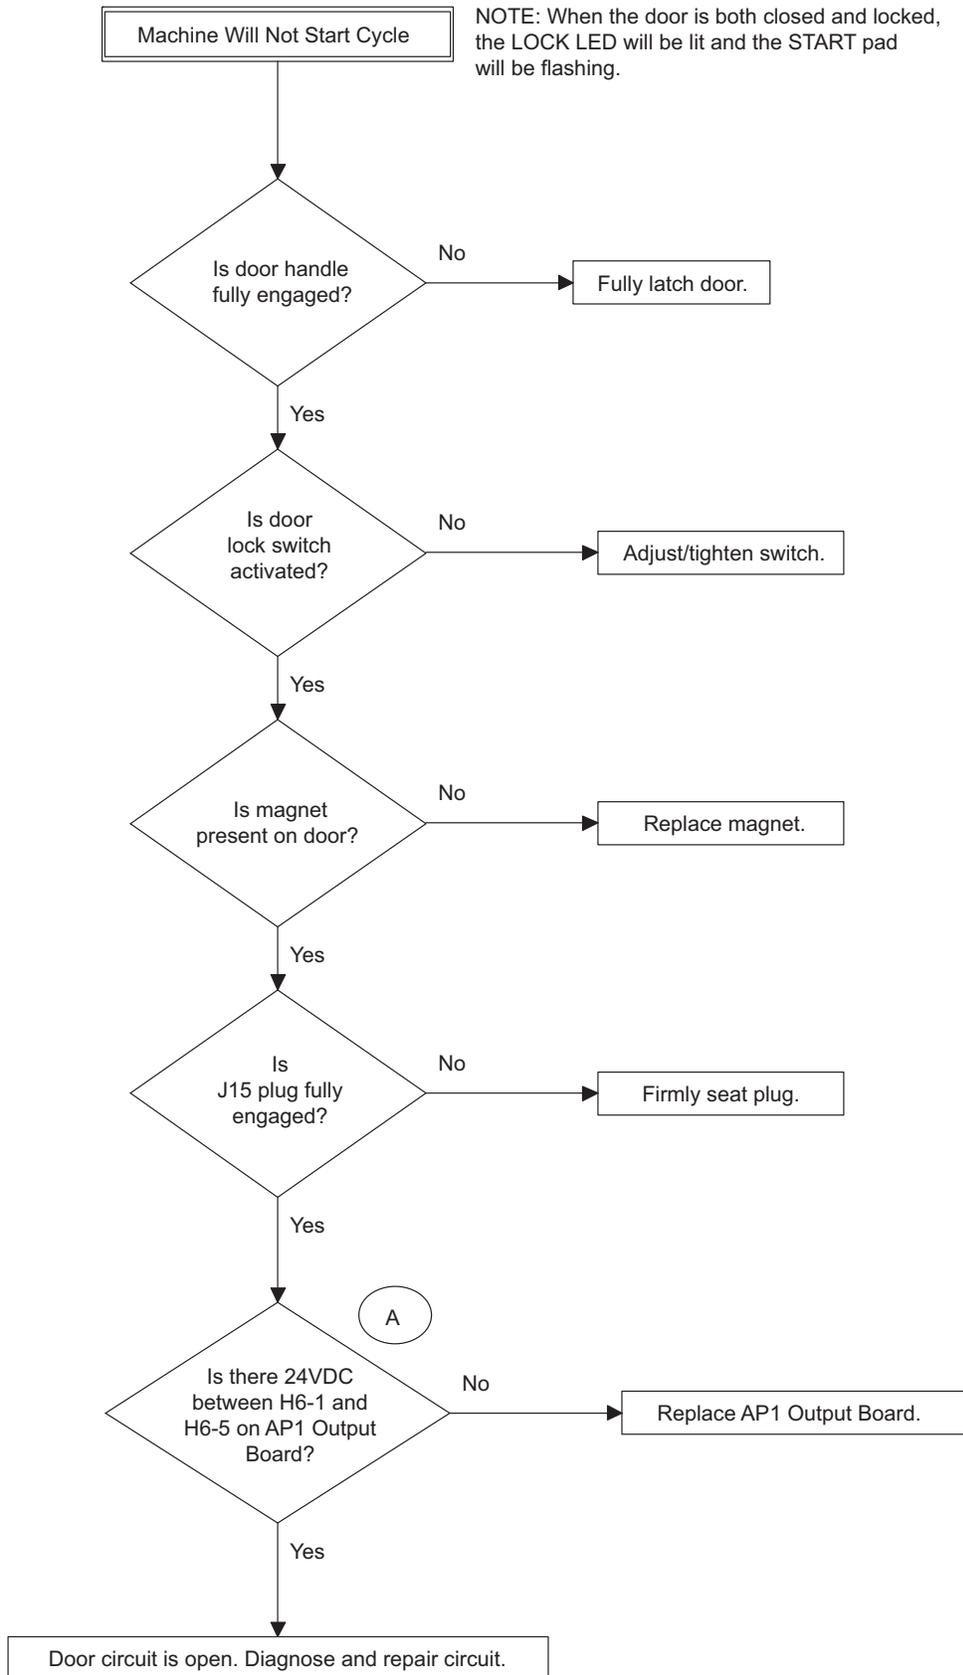

PHM2119S


Machine Will Not Start Cycle

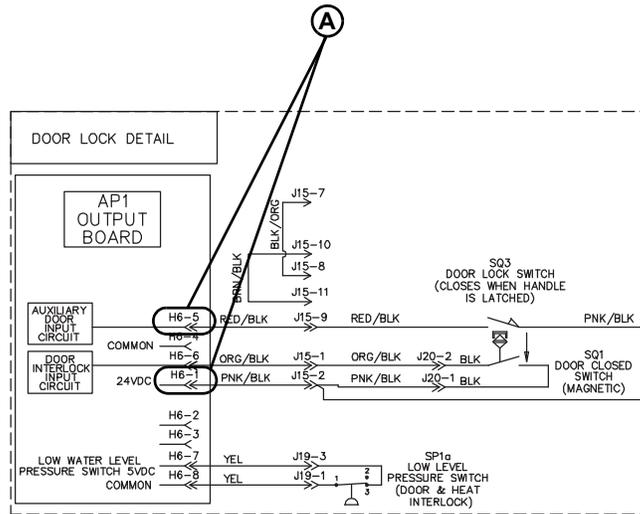

PHM2103S


NOTE: Refer to the wiring diagram supplied with your machine.

2. Door Will Not Unlock at End of the Cycle

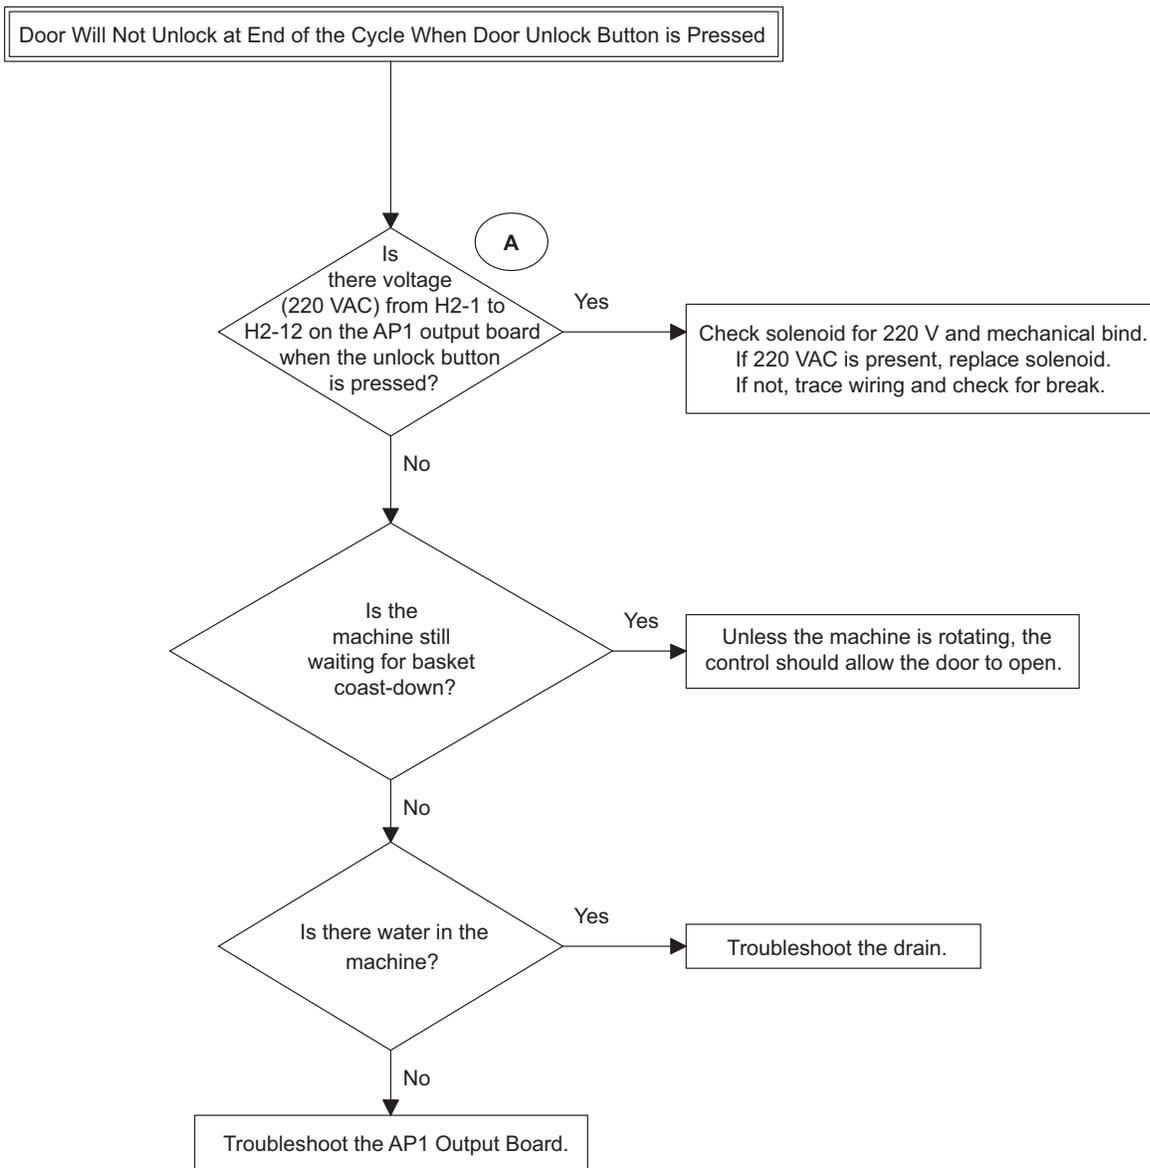


PHM2104S

3. No External Supplies

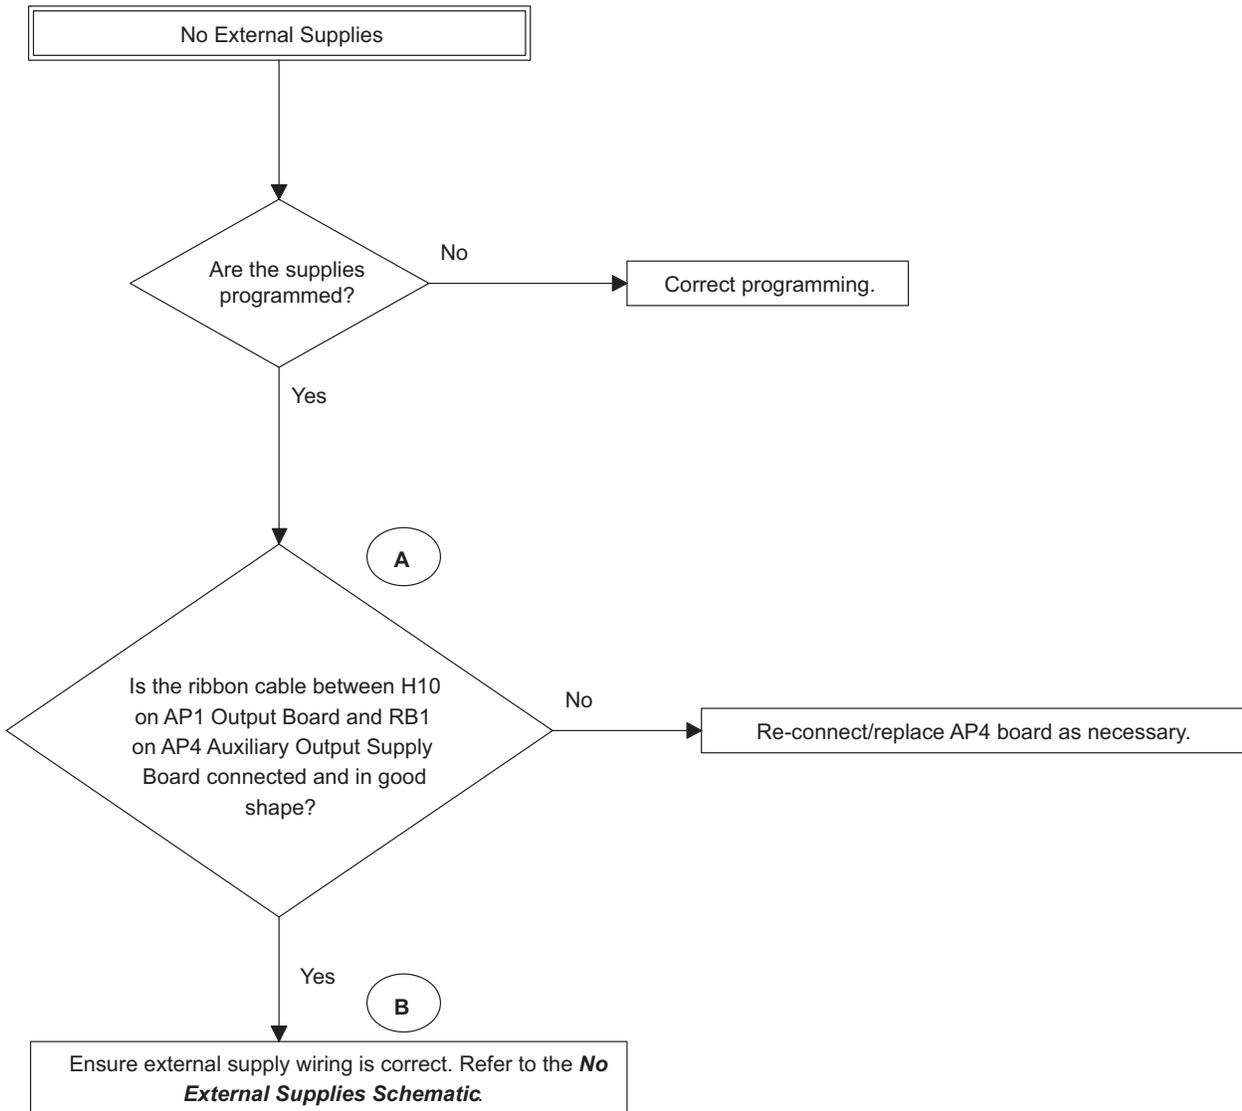


PHM2106S

4. Excessive Vibration and/or Noise During Spin (Drawing 1 of 2)

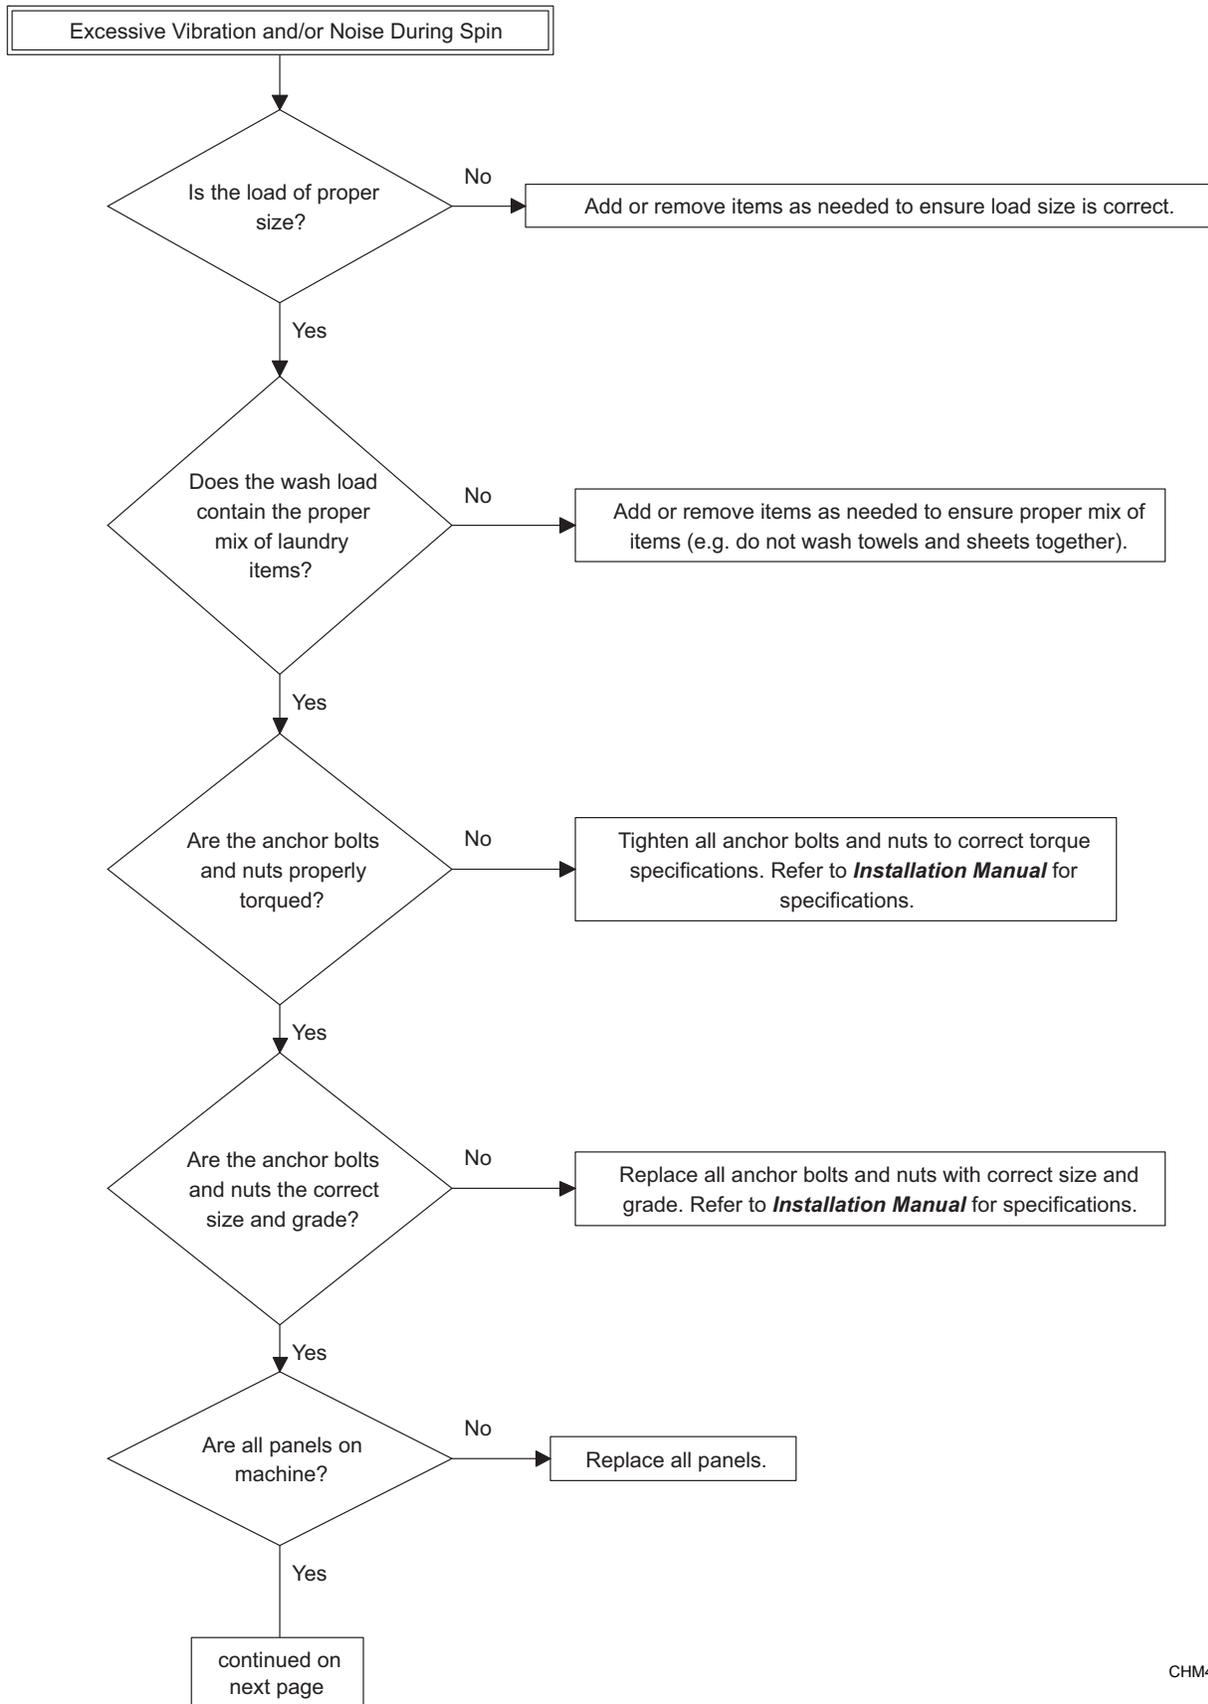


CHM465S-a

4. Excessive Vibration and/or Noise During Spin (Drawing 2 of 2)

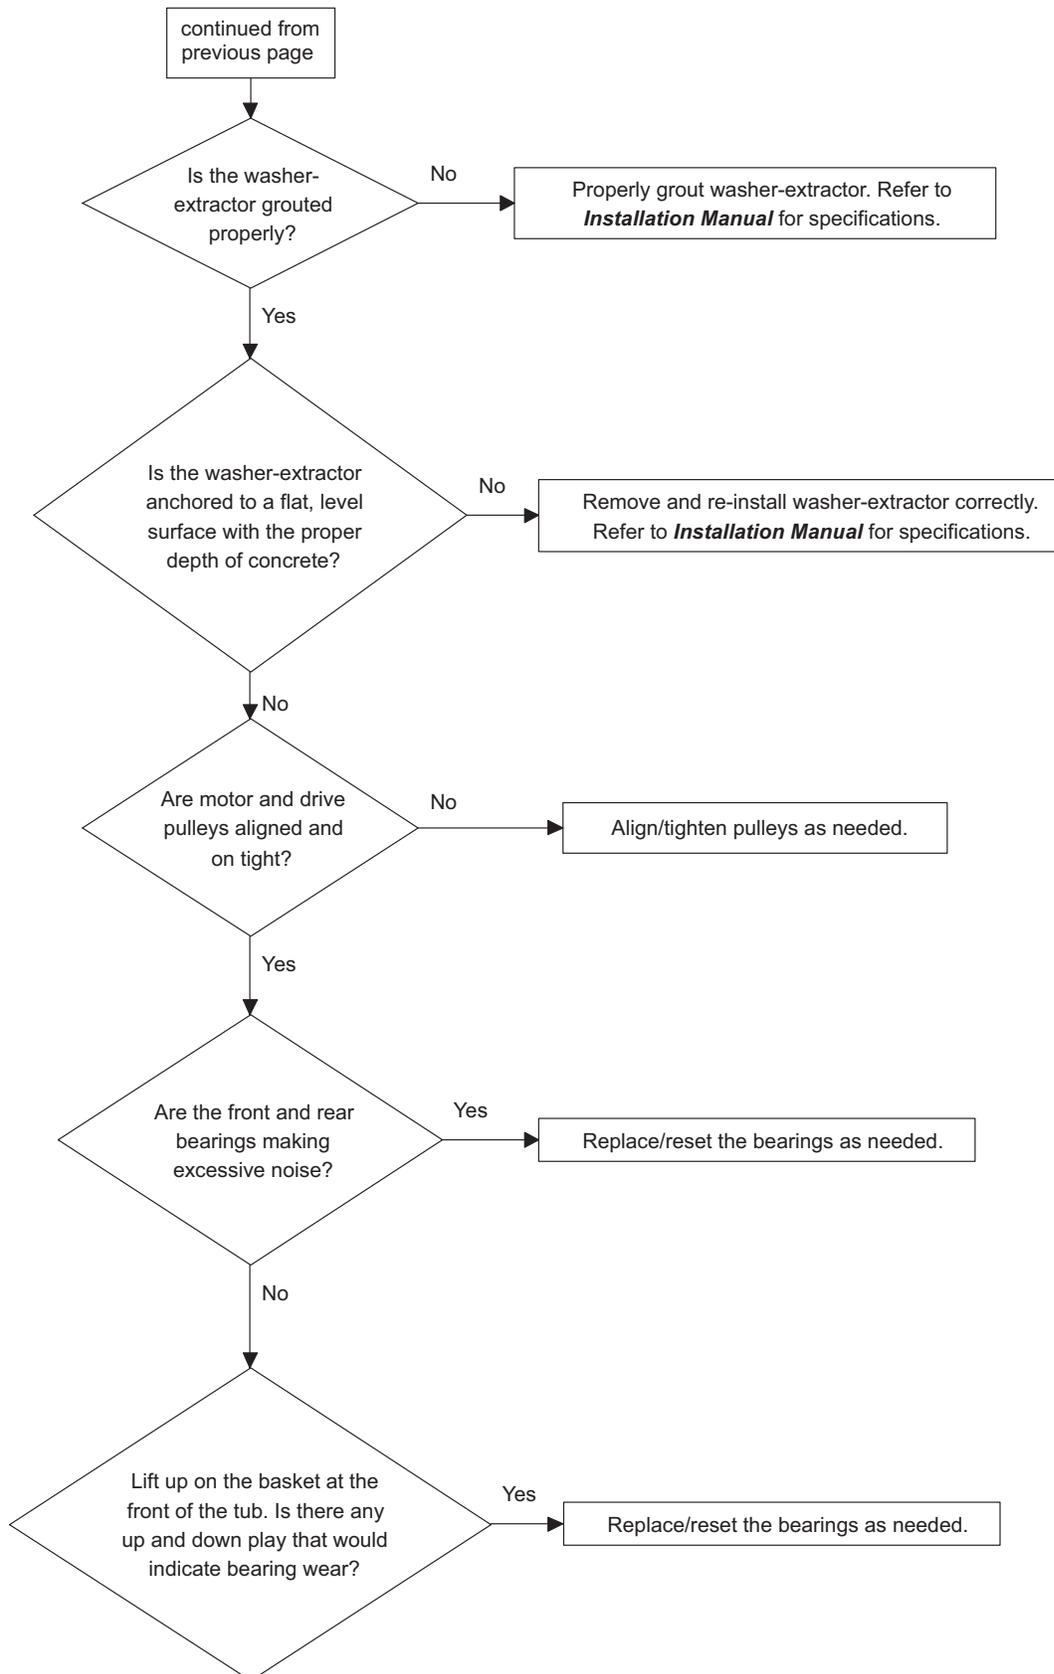


PHM2108S

5. Machine Does Not Fill with Water

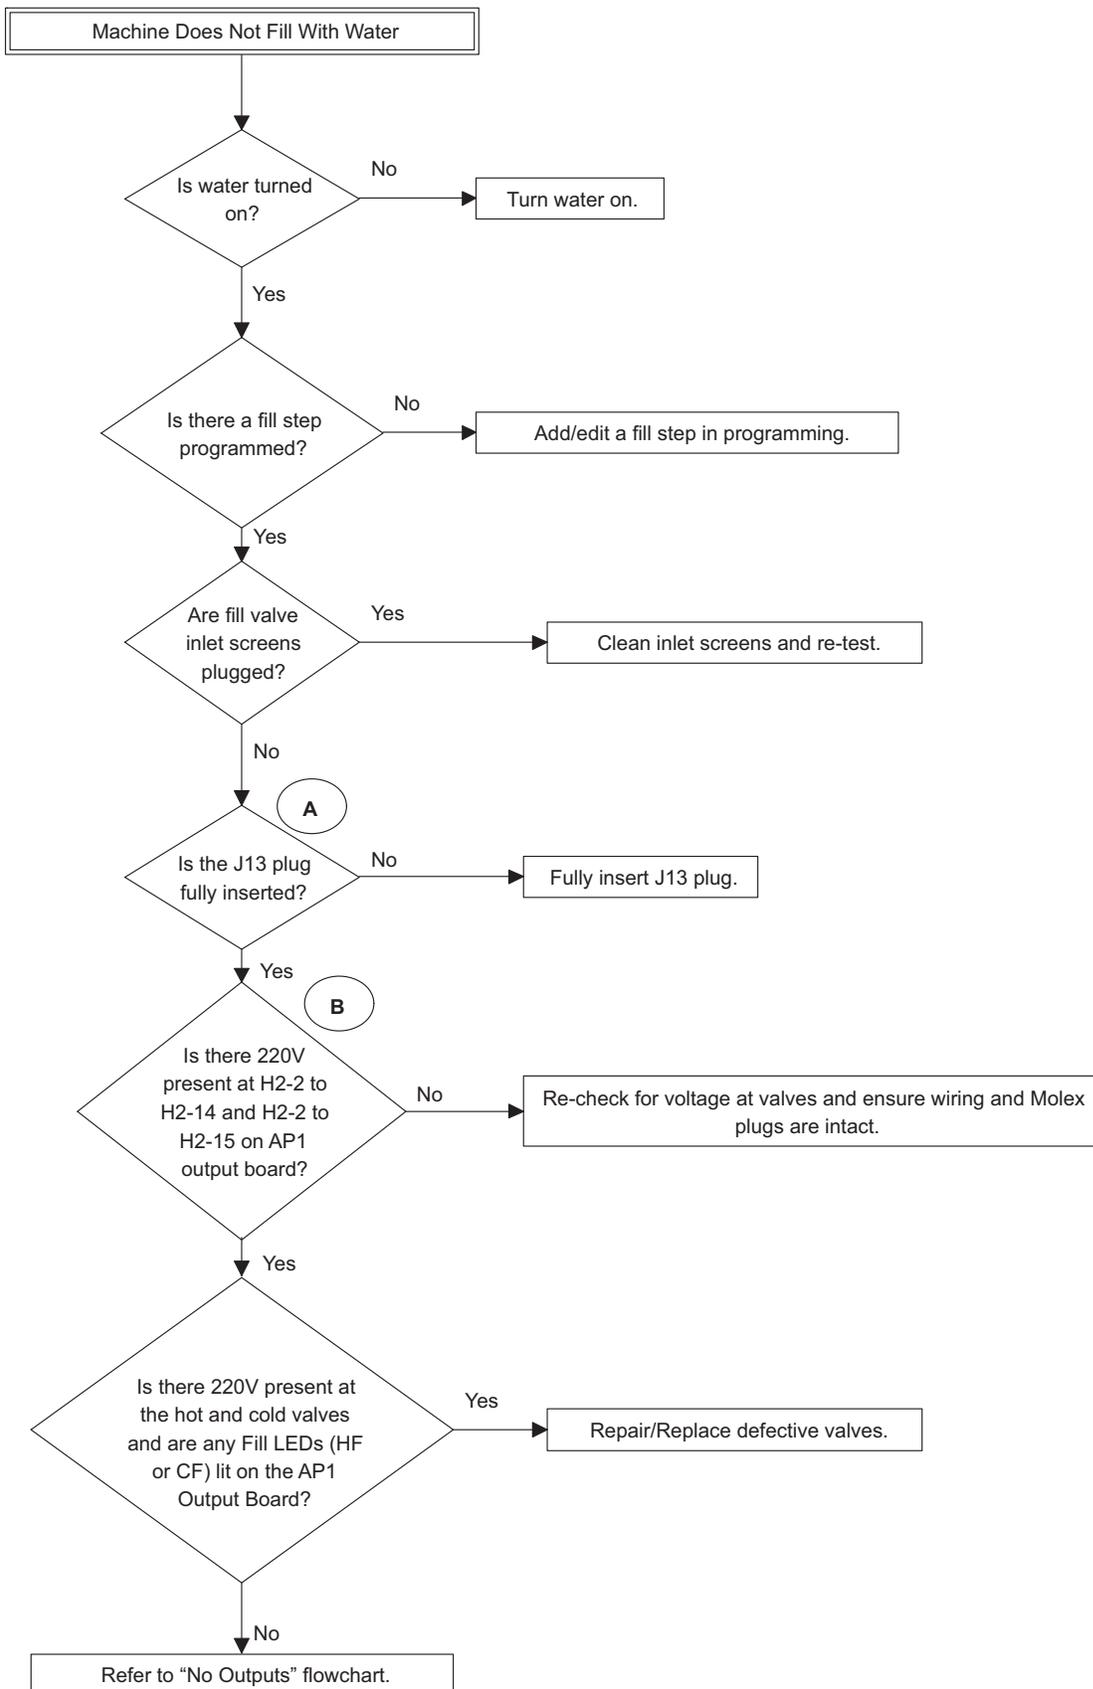


PHM2109S

6. No Display

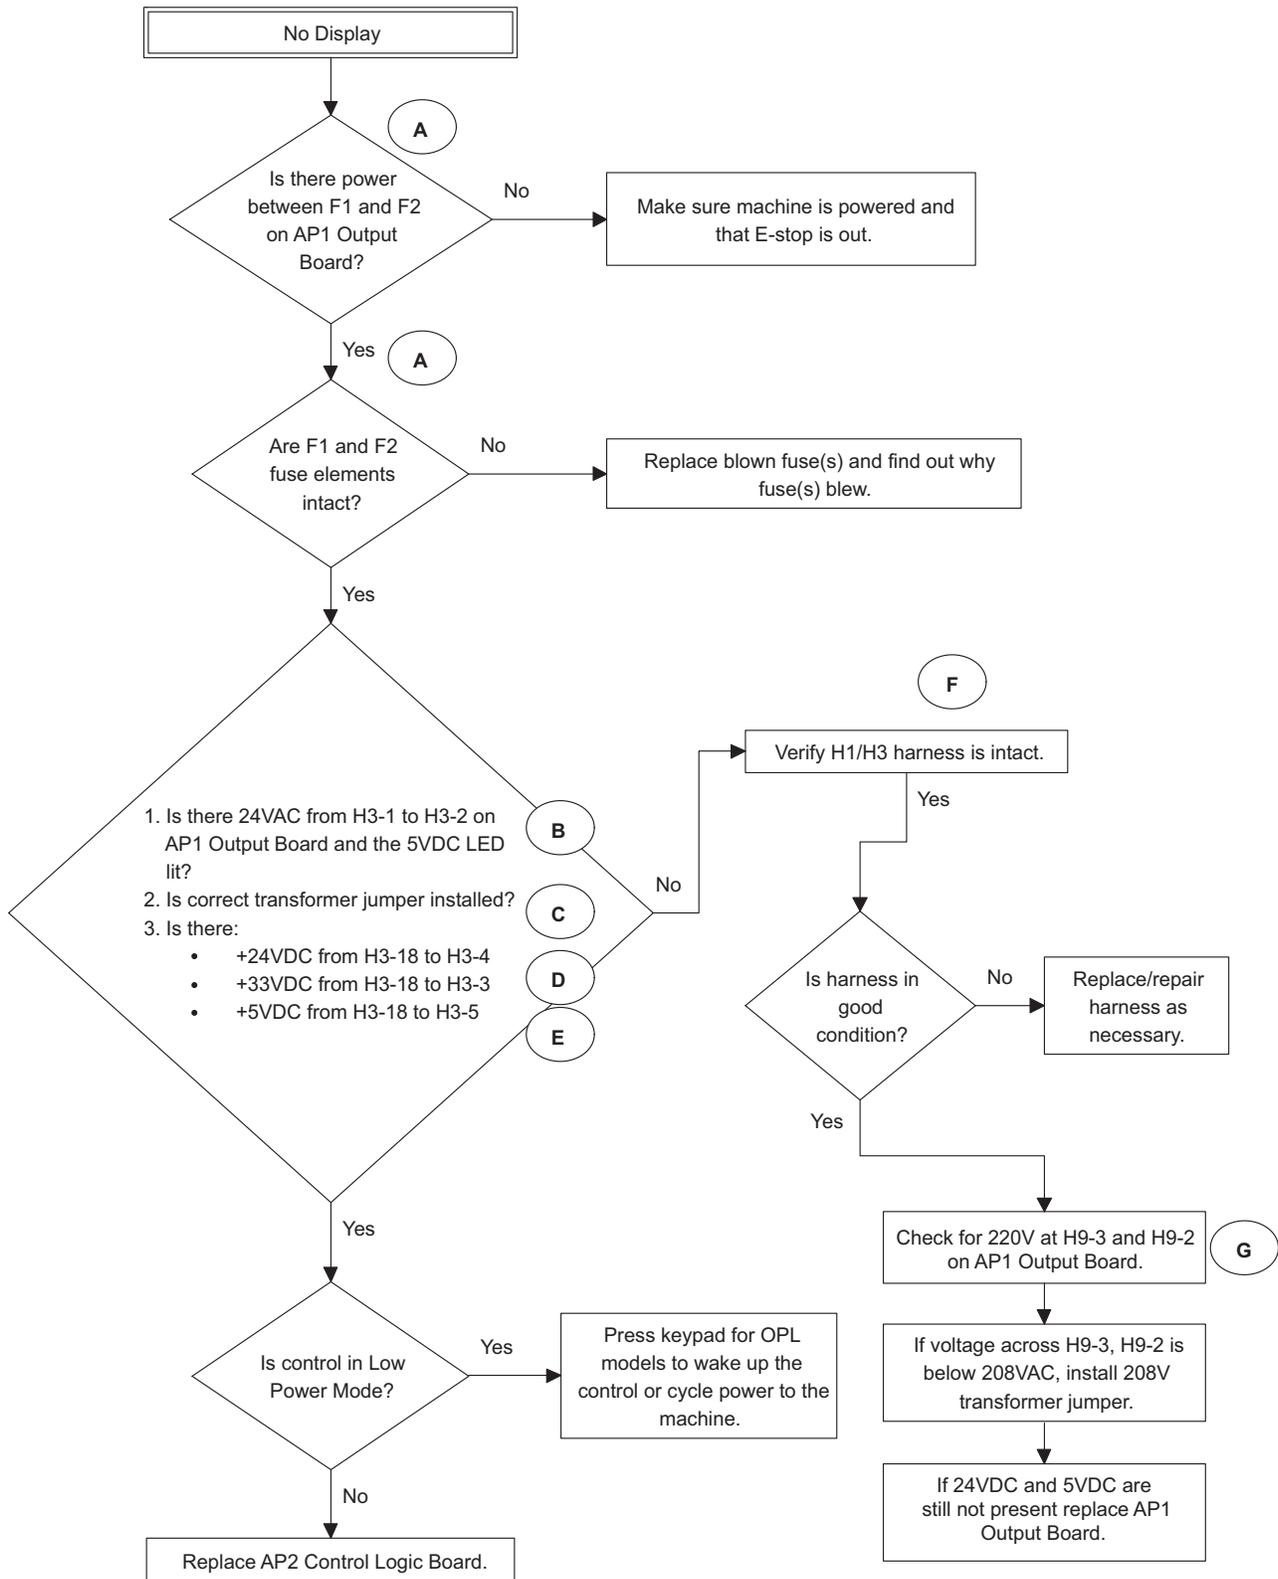


PHM2111S

7. No Outputs

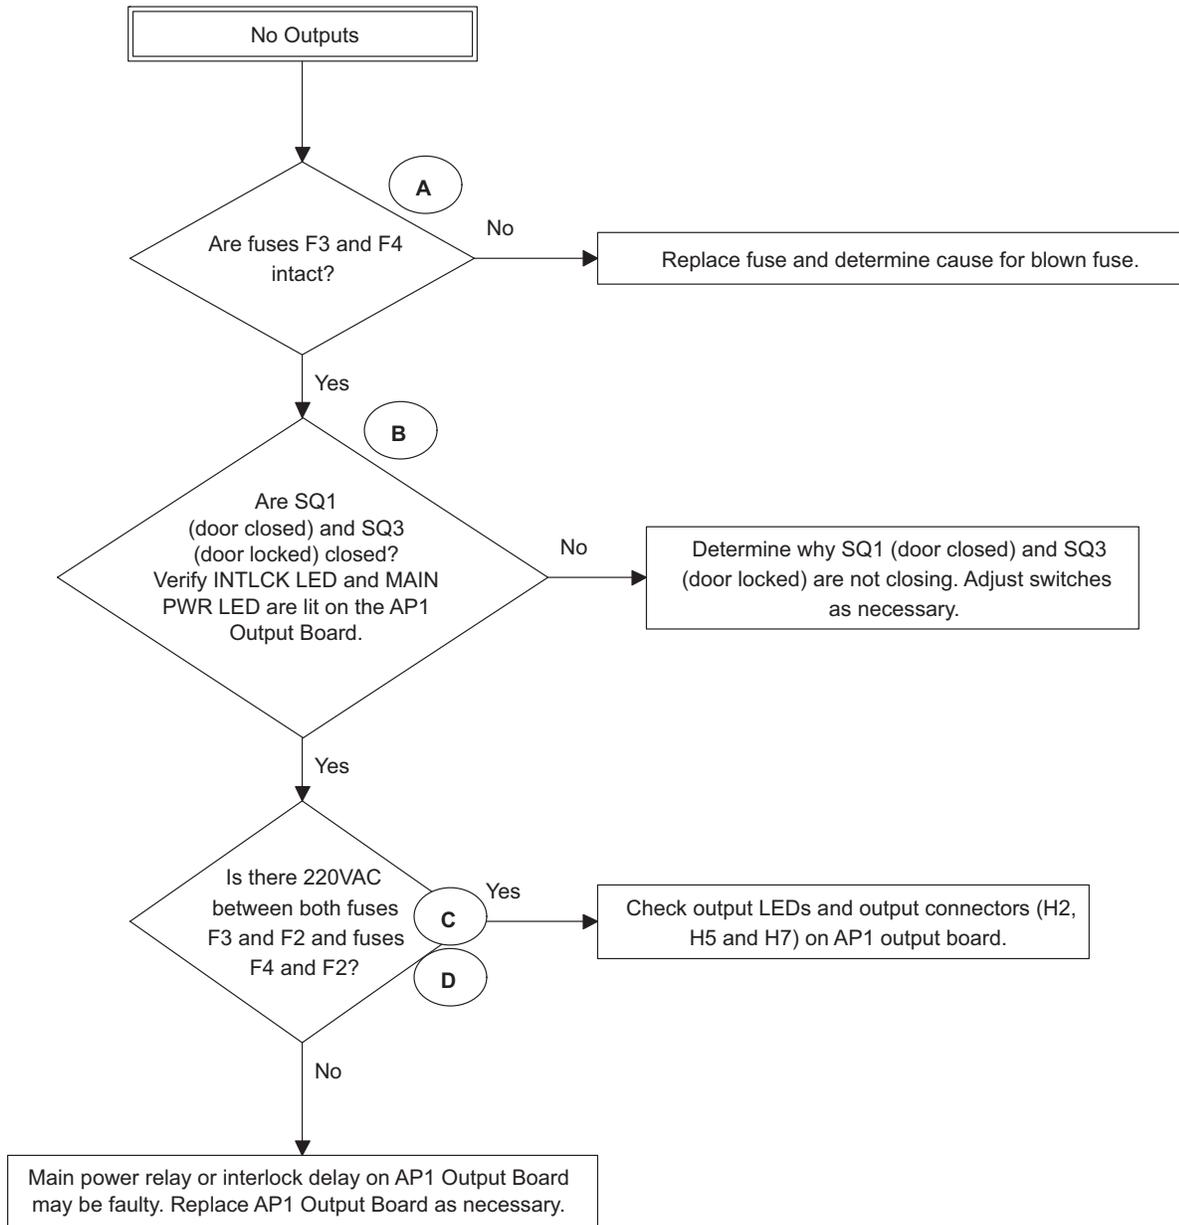


PHM2113S

No Outputs

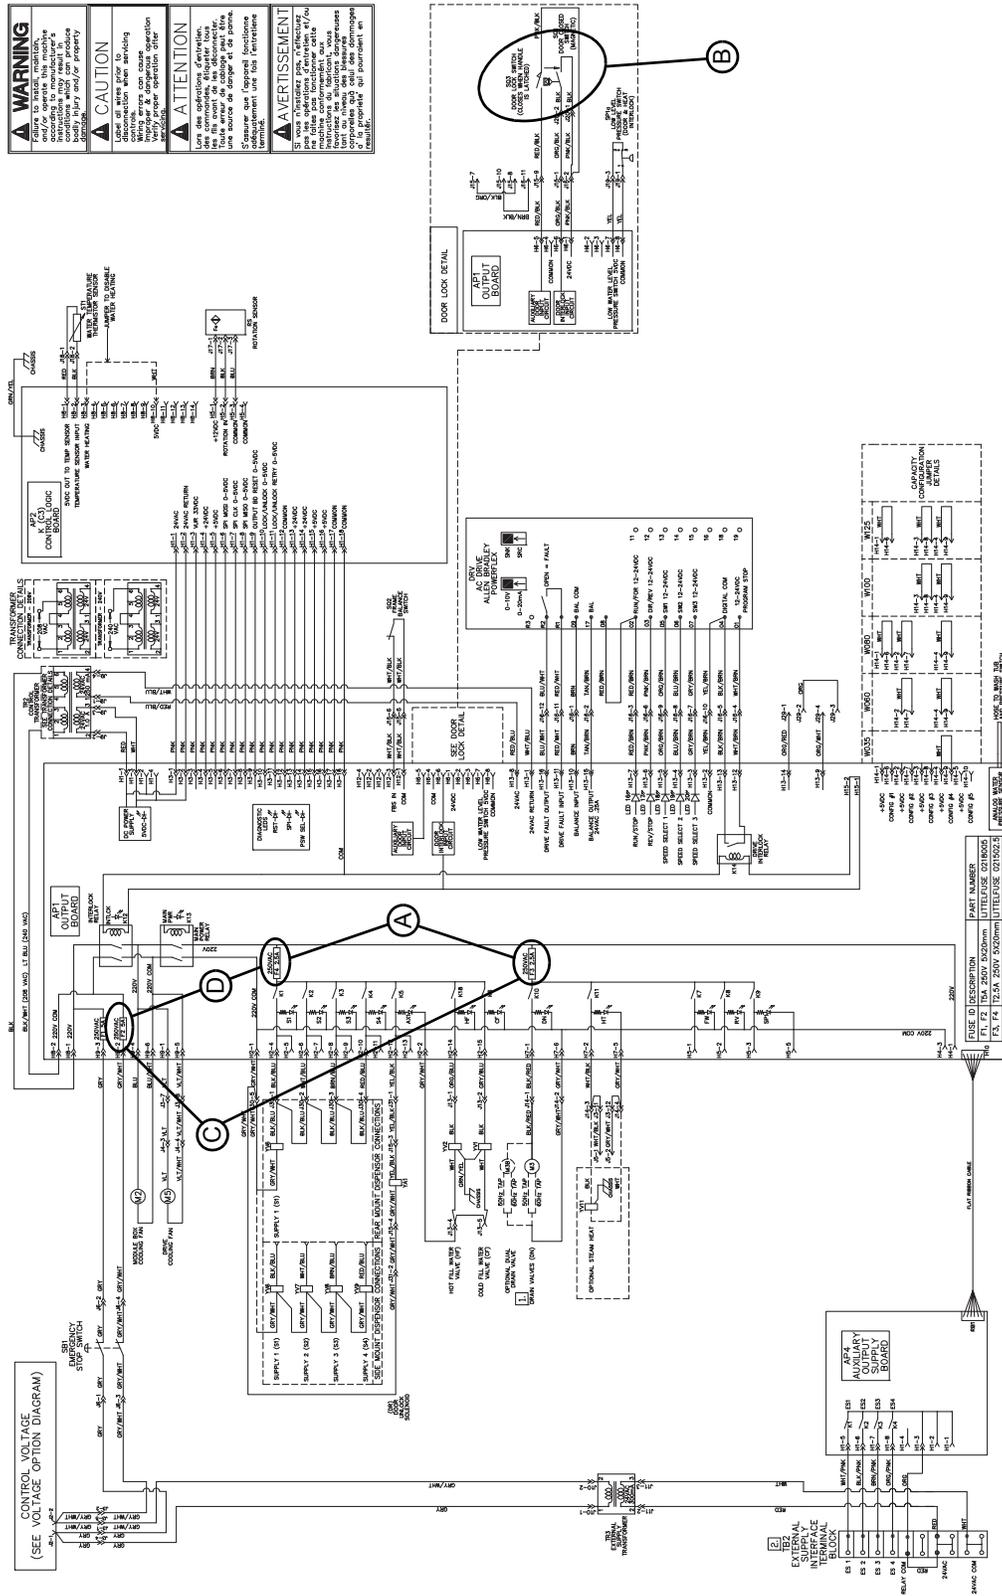


NOTE: Refer to the wiring diagram supplied with your machine.

8. Excessive Cycle Time

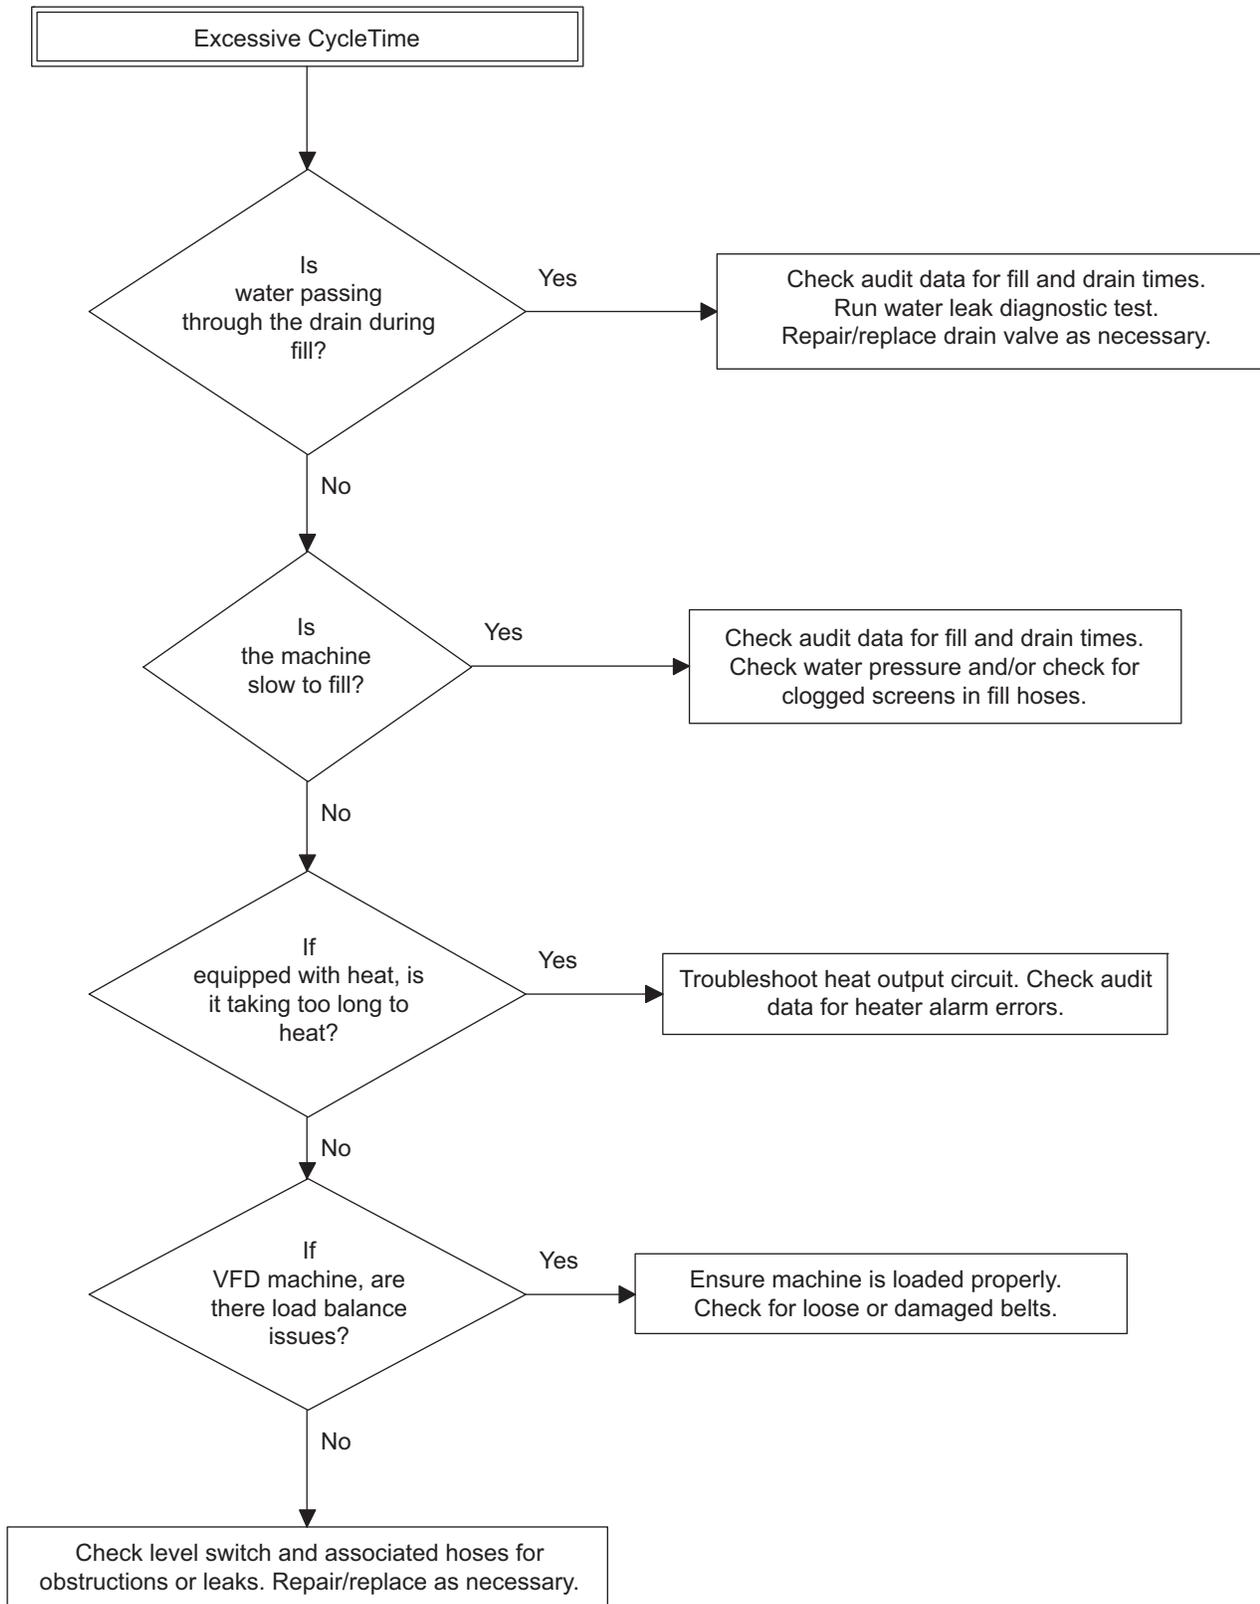


PHM2114S

9. No Keypad Function

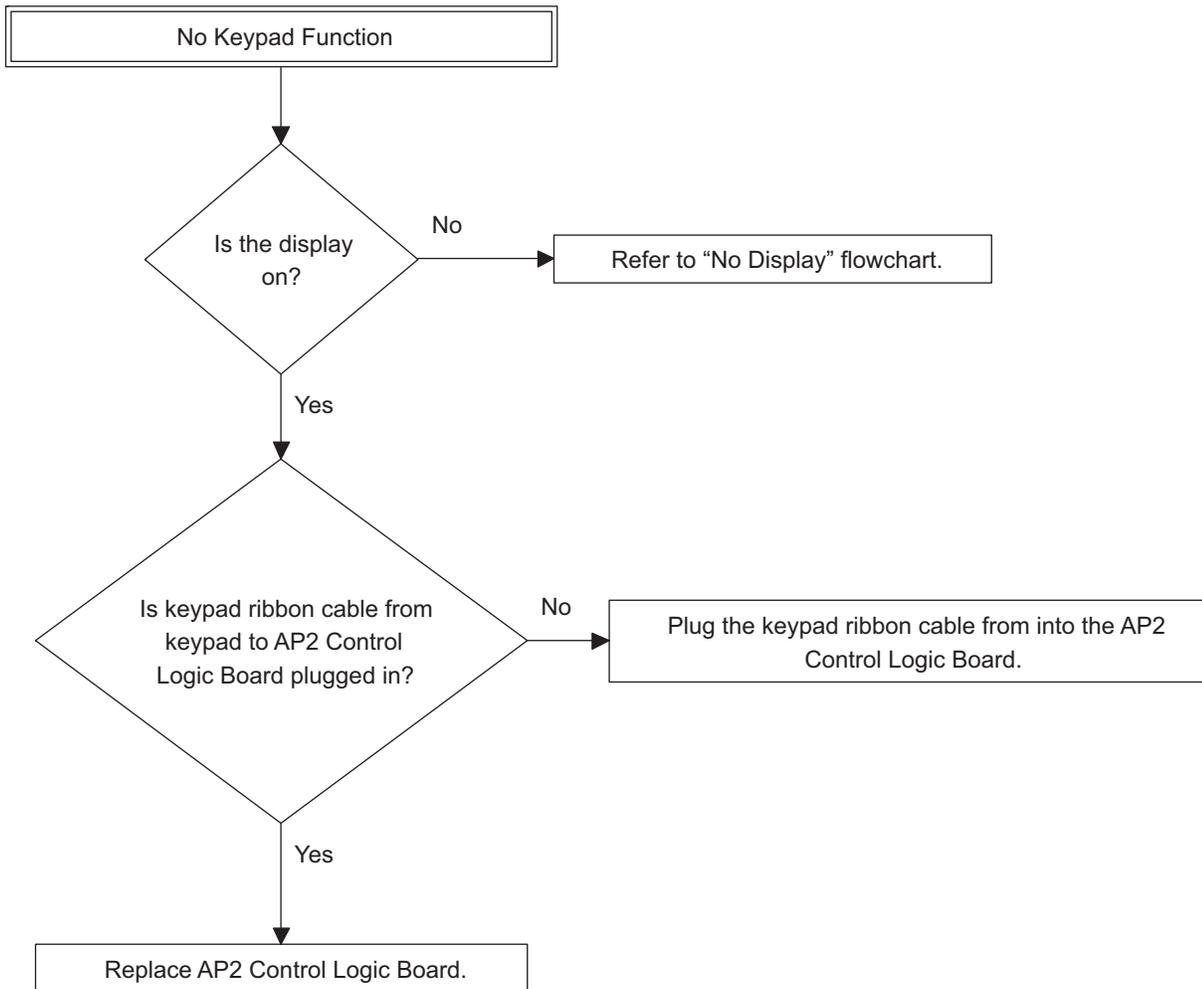


CHM470S

10. Abnormal Operation

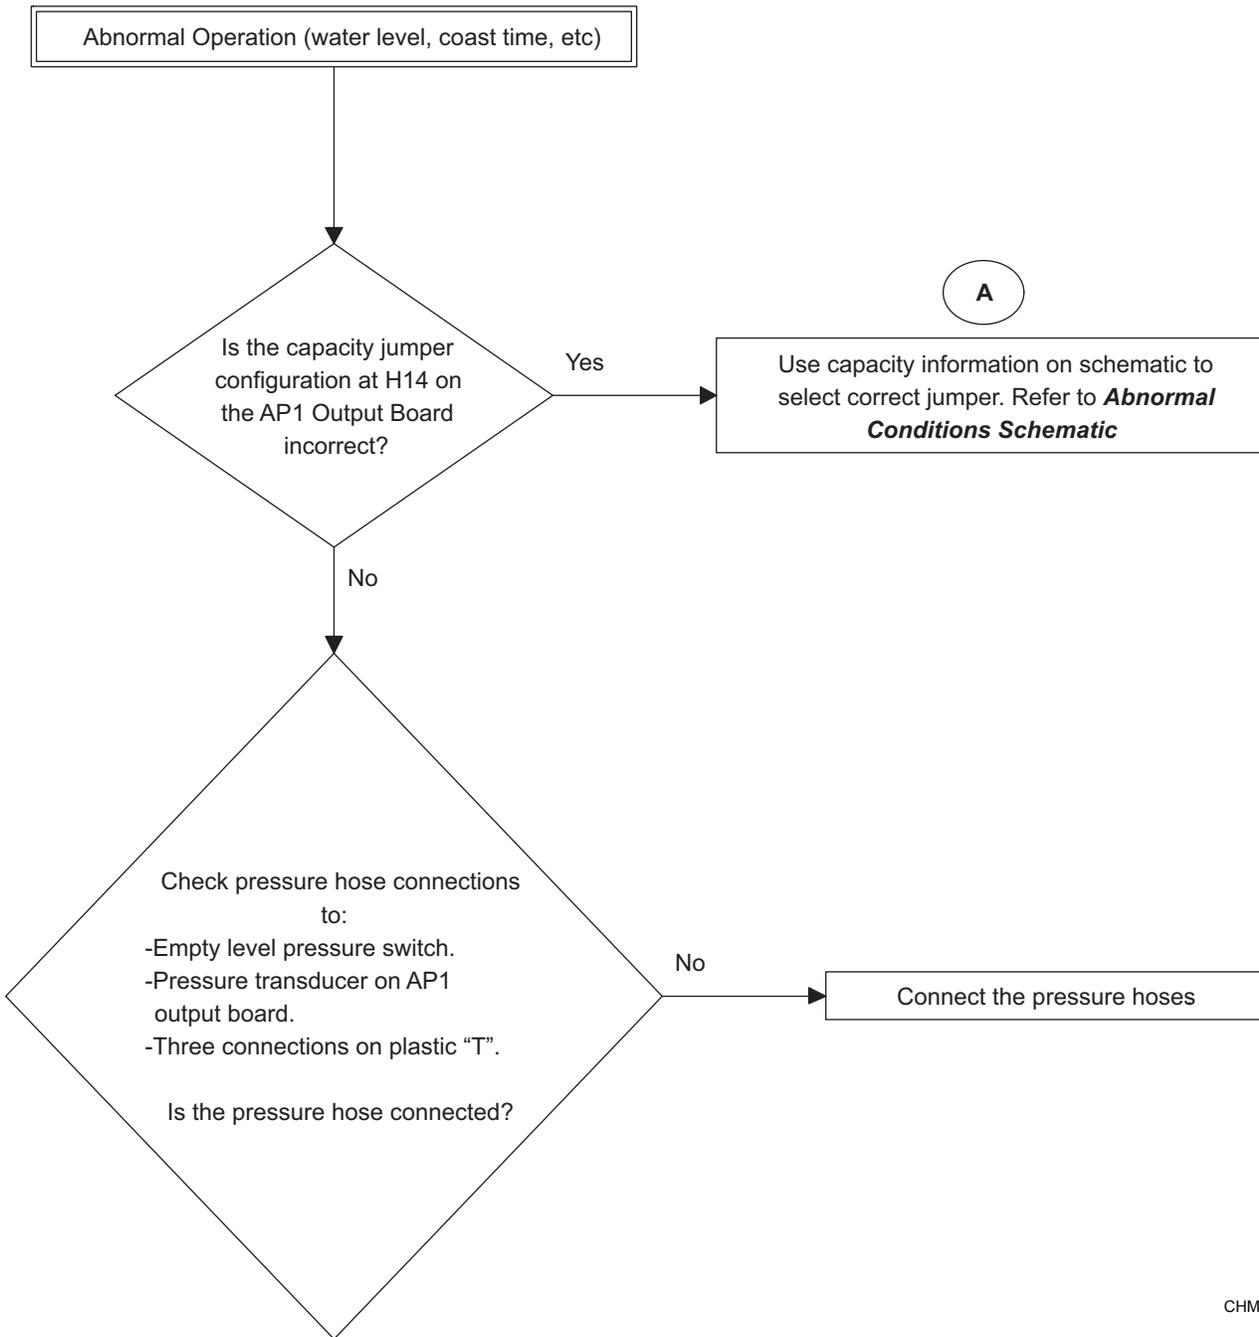


CHM471S

11. No High Extract

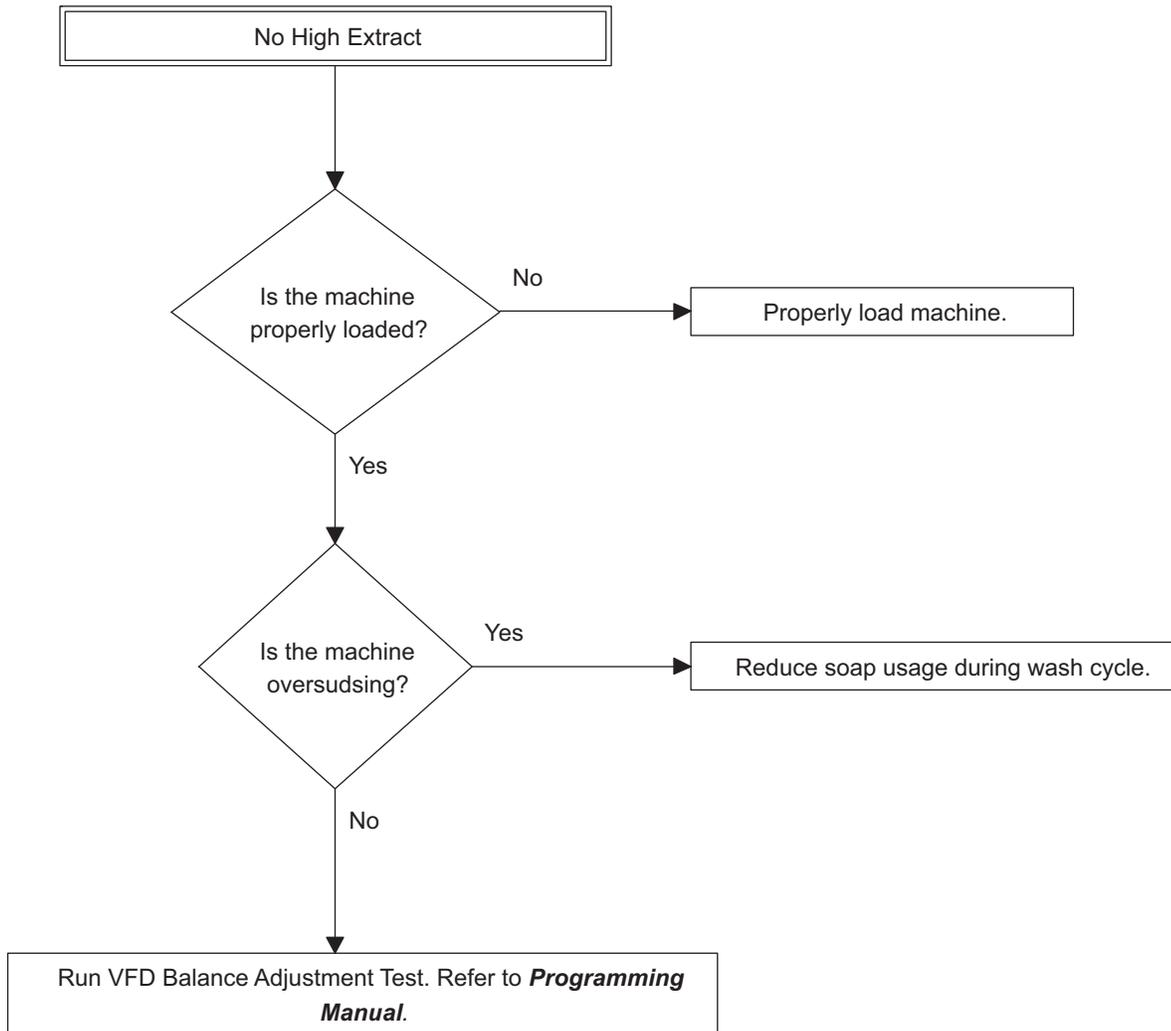


CHM474S

12. No Extract (F and V-speed Models)

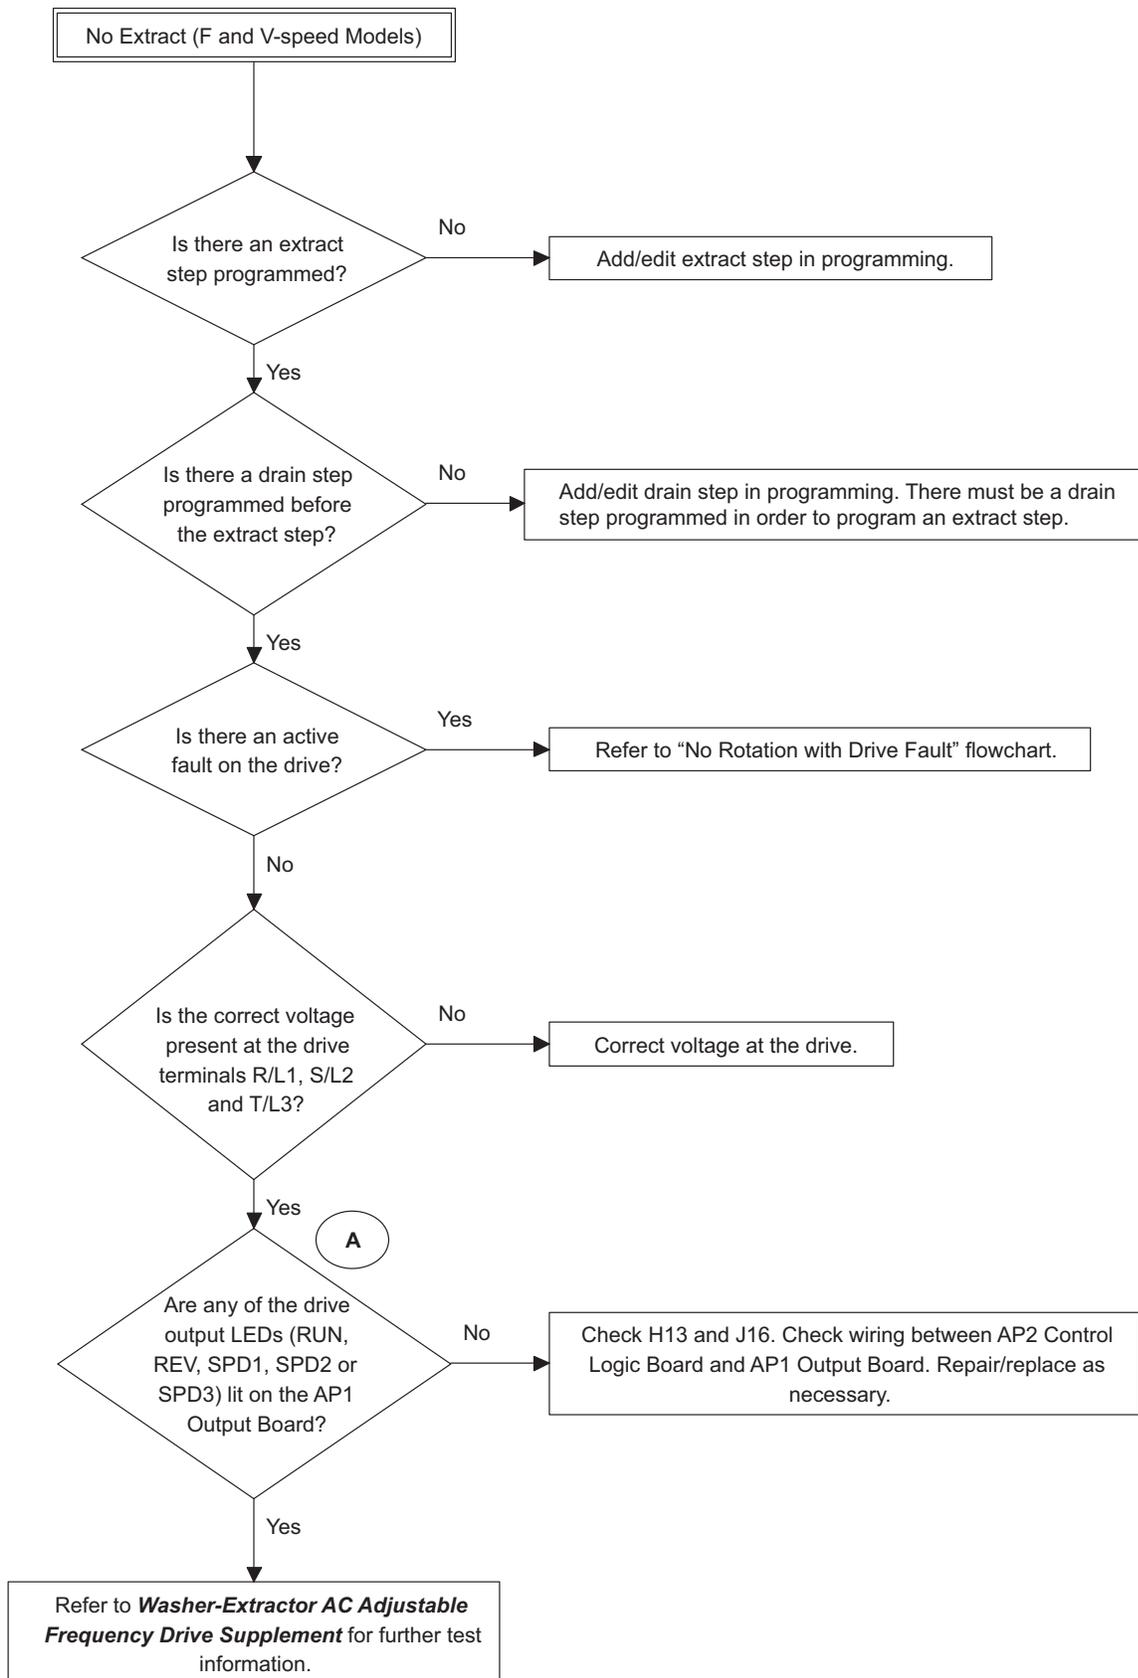


PHM2115S

No Extract (F and V-speed Models)

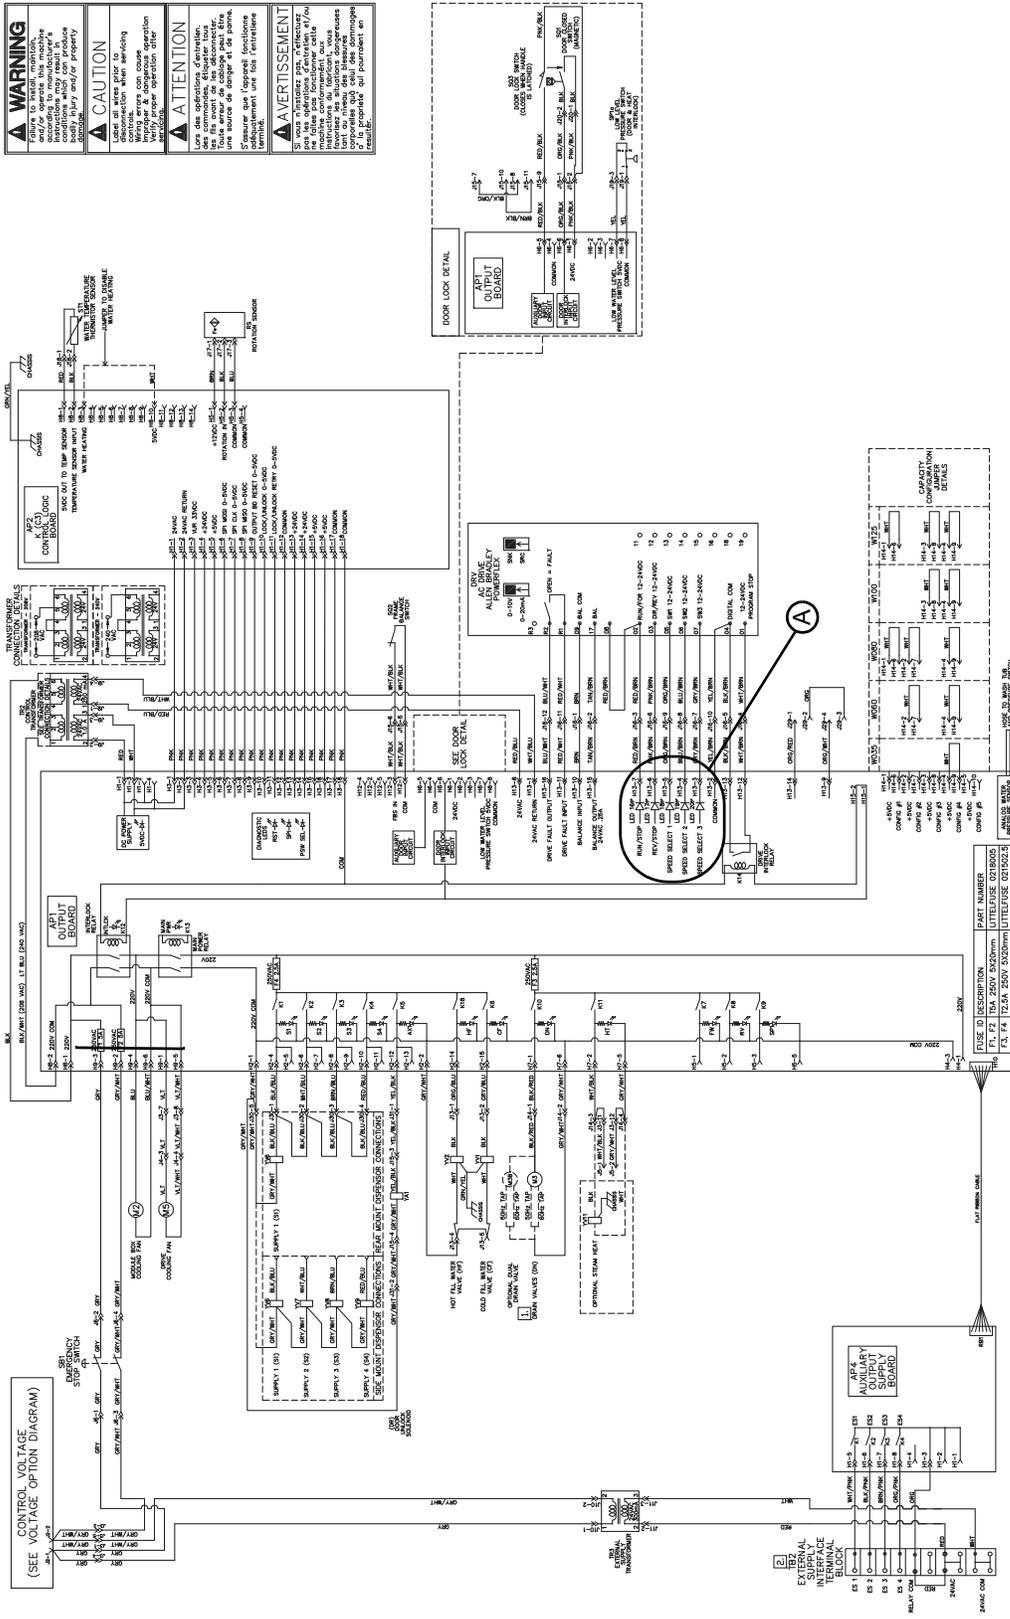


NOTE: Refer to the wiring diagram supplied with your machine.

13. No Extract (2 Speed Models)

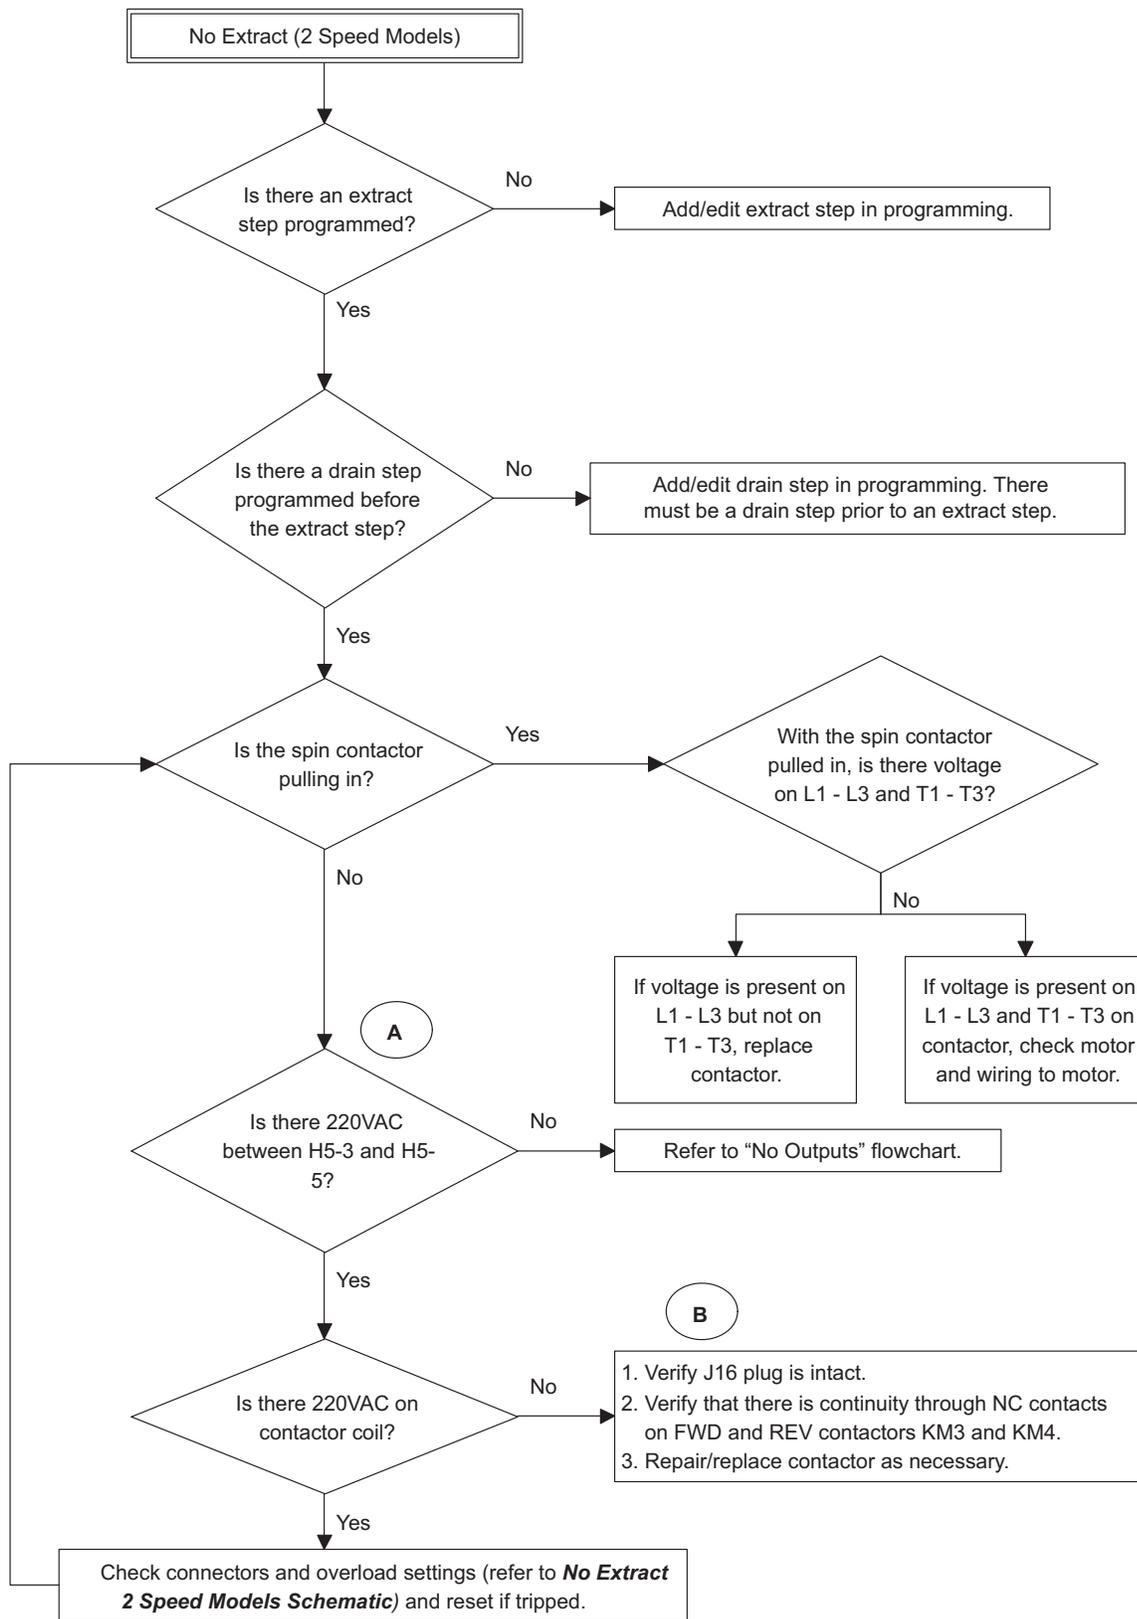


14. No Basket Rotation (2 Speed Models)

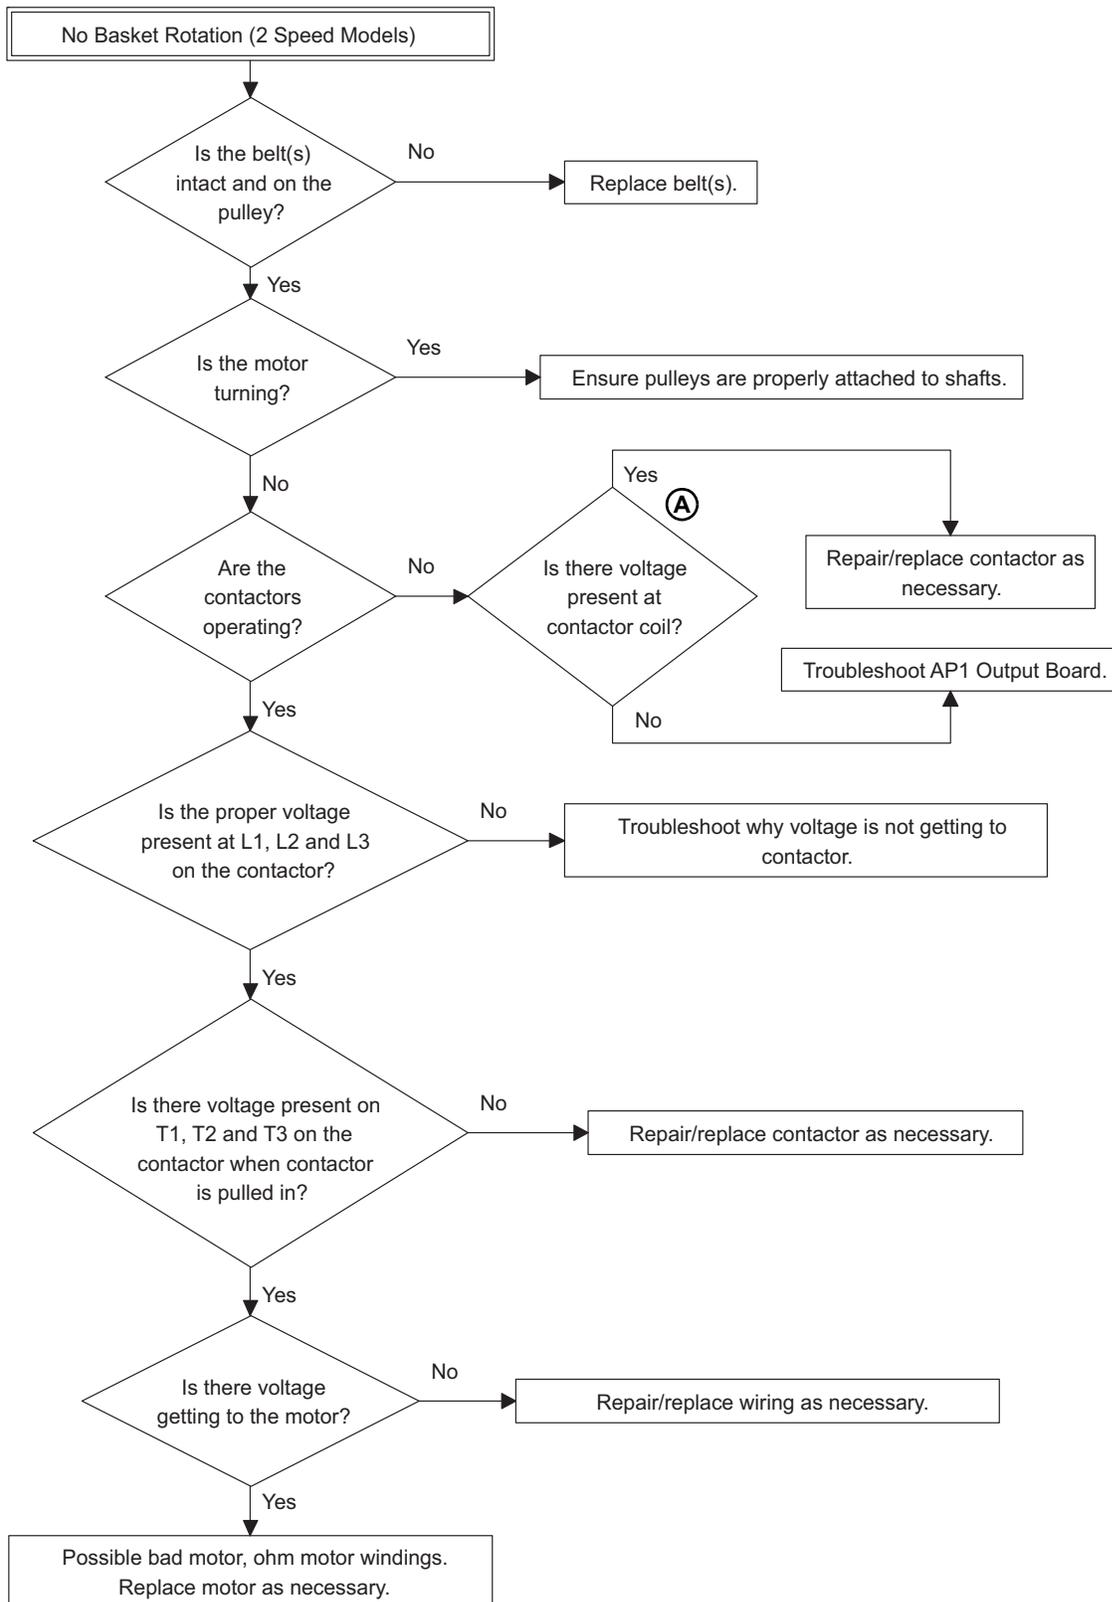


CHM478S

15. No Rotation with Drive Fault

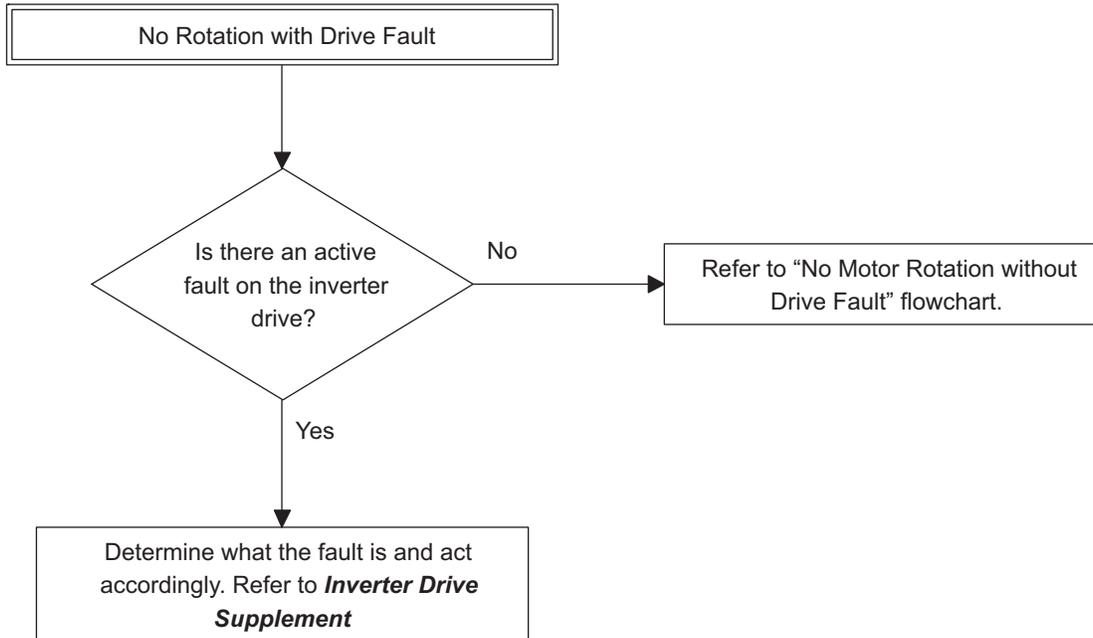


CHM475S

16. No Rotation without Drive Fault

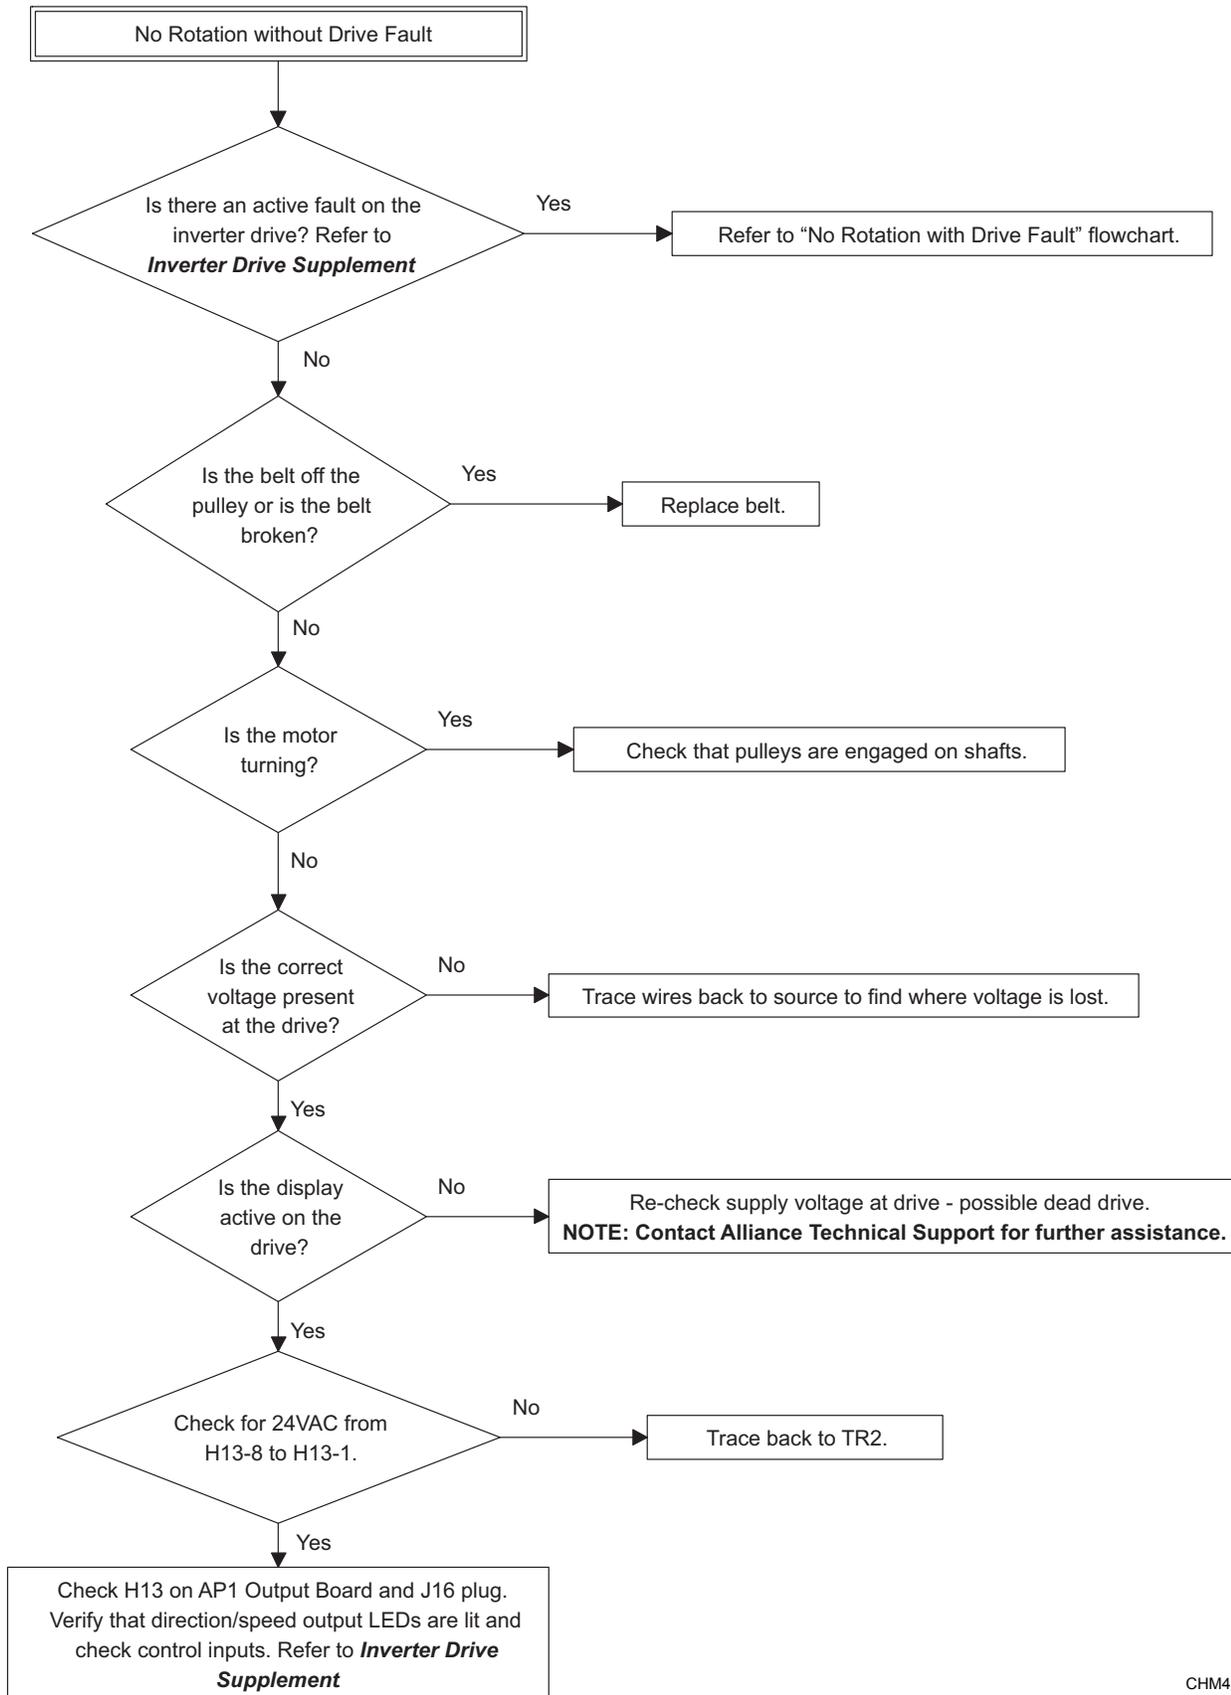


CHM476S

17. EFS Error – Fixed Speed Models

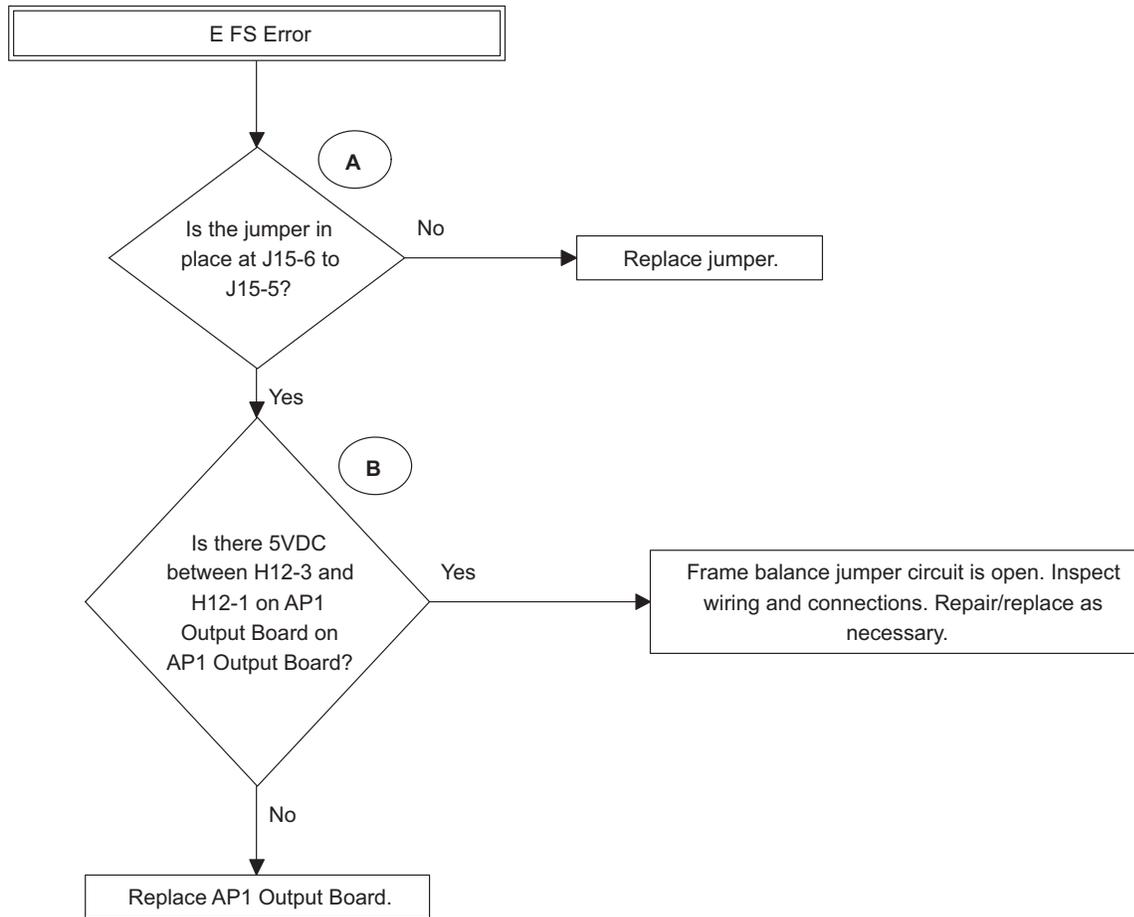


PHM2118S

EFS Error – Fixed Speed Models

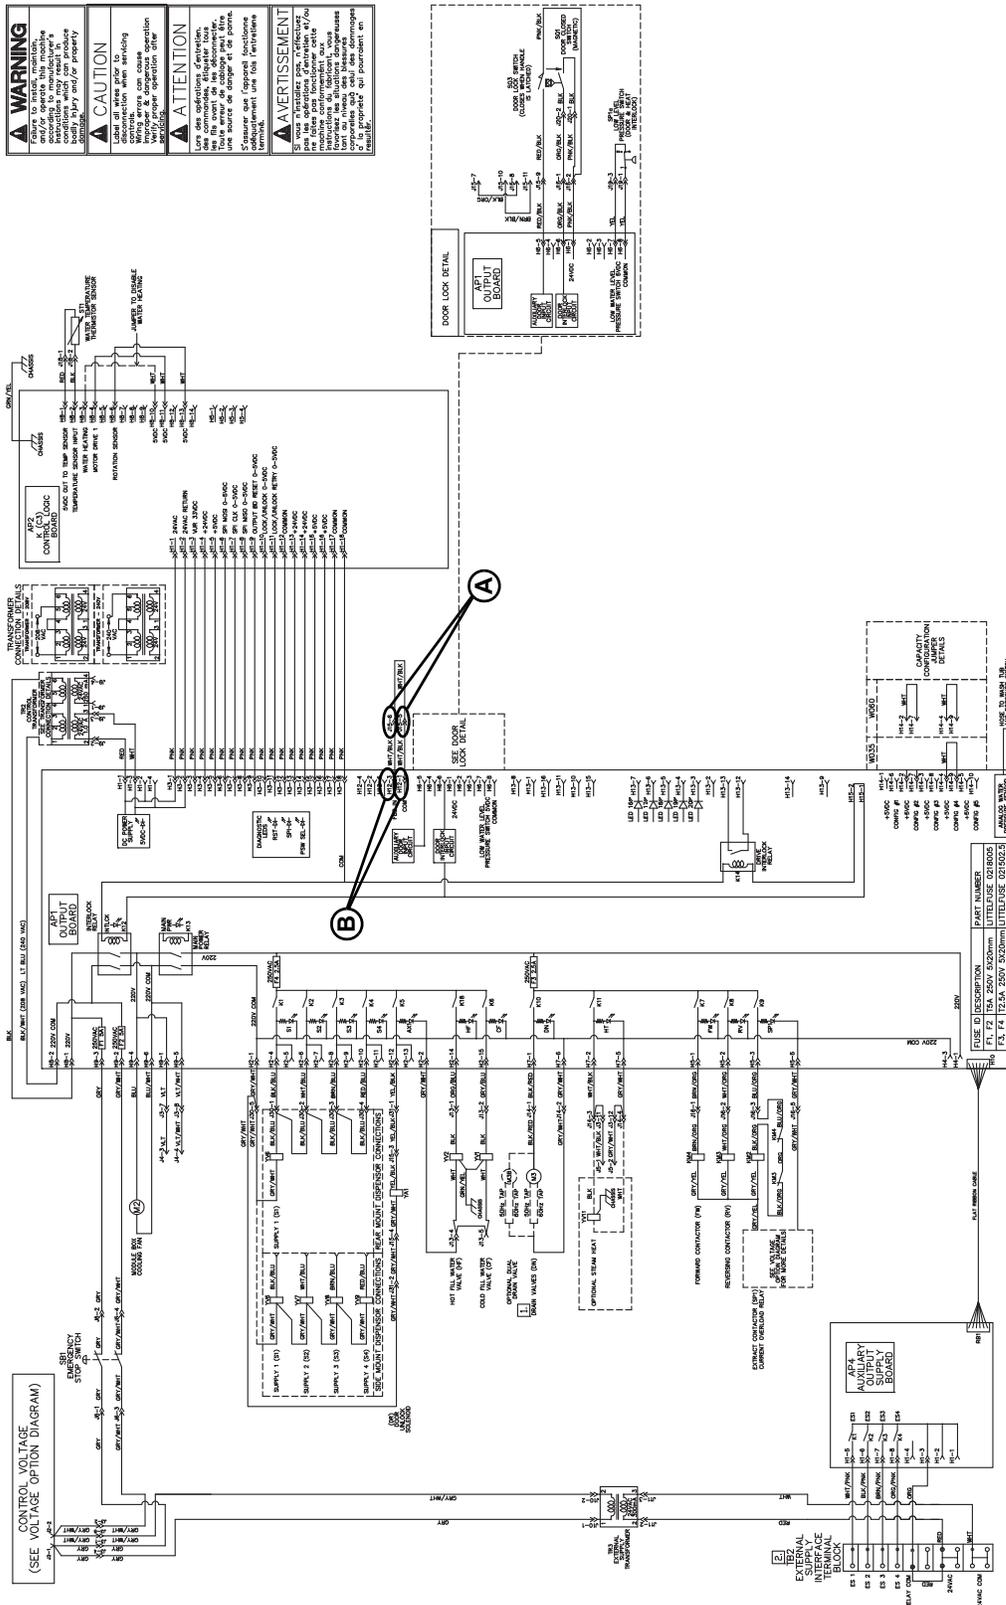


NOTE: Refer to the wiring diagram supplied with your machine.

18. EFS Error – Variable Speed Models

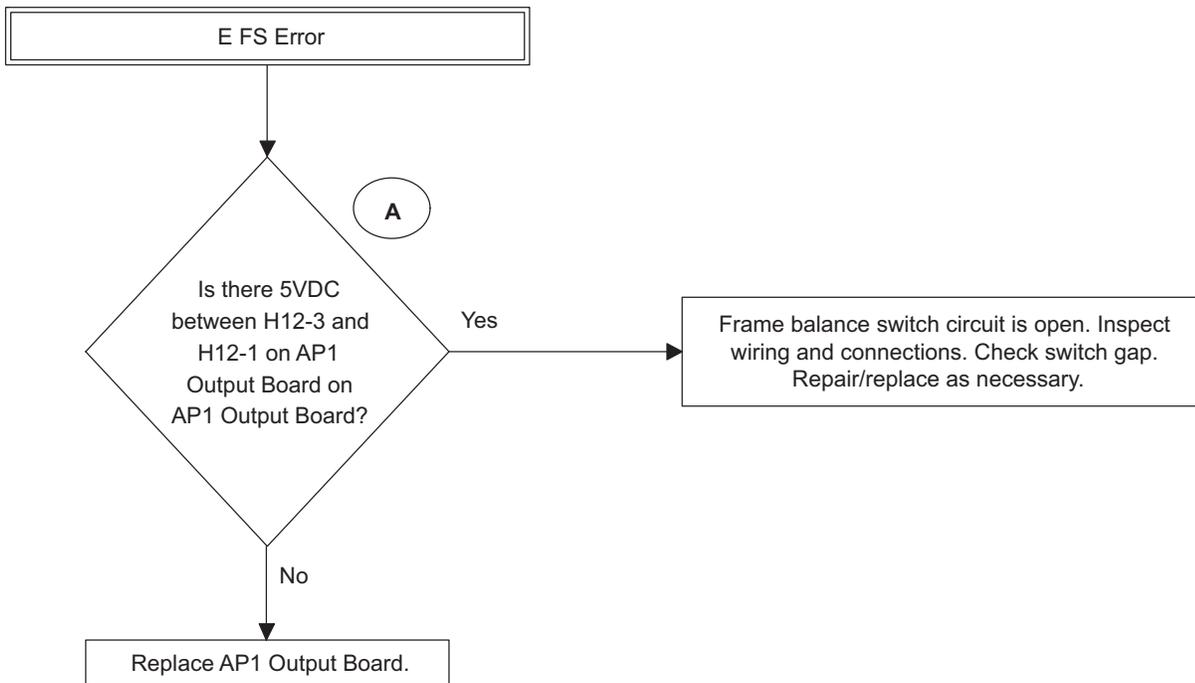


PHM2107S

19. Heat Error (Machines with Auxillary Heat Only)

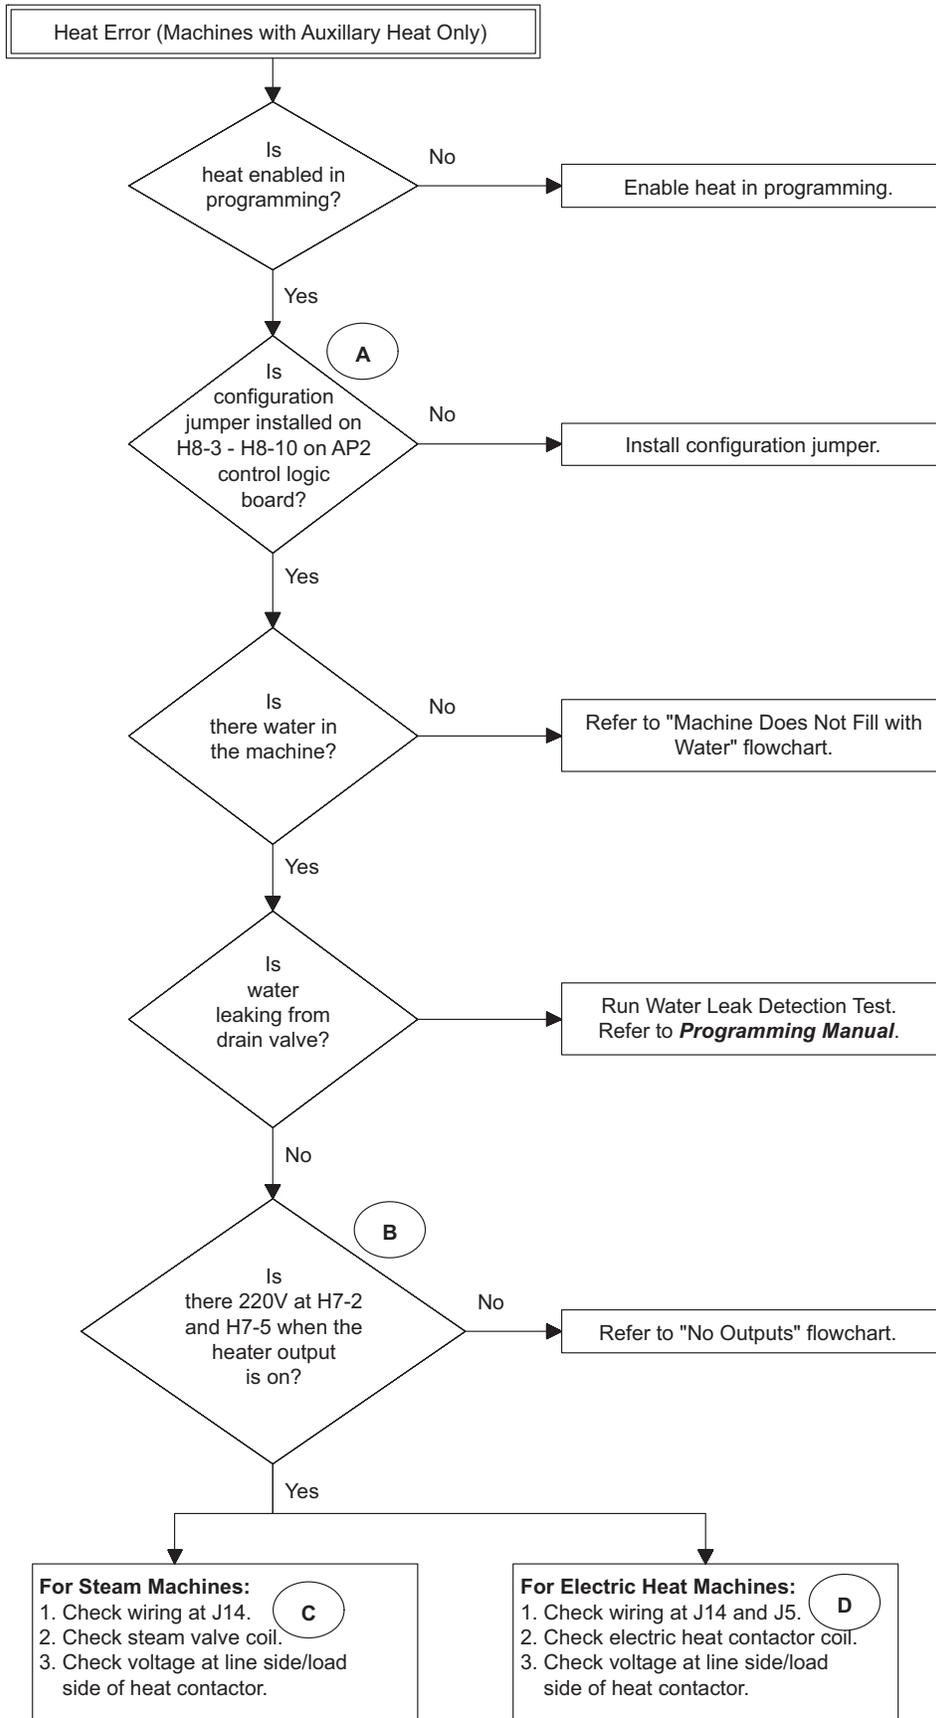

PHM2110S

20. Control Will Not Allow PDA to Download a Machine Cycle it is Currently Running

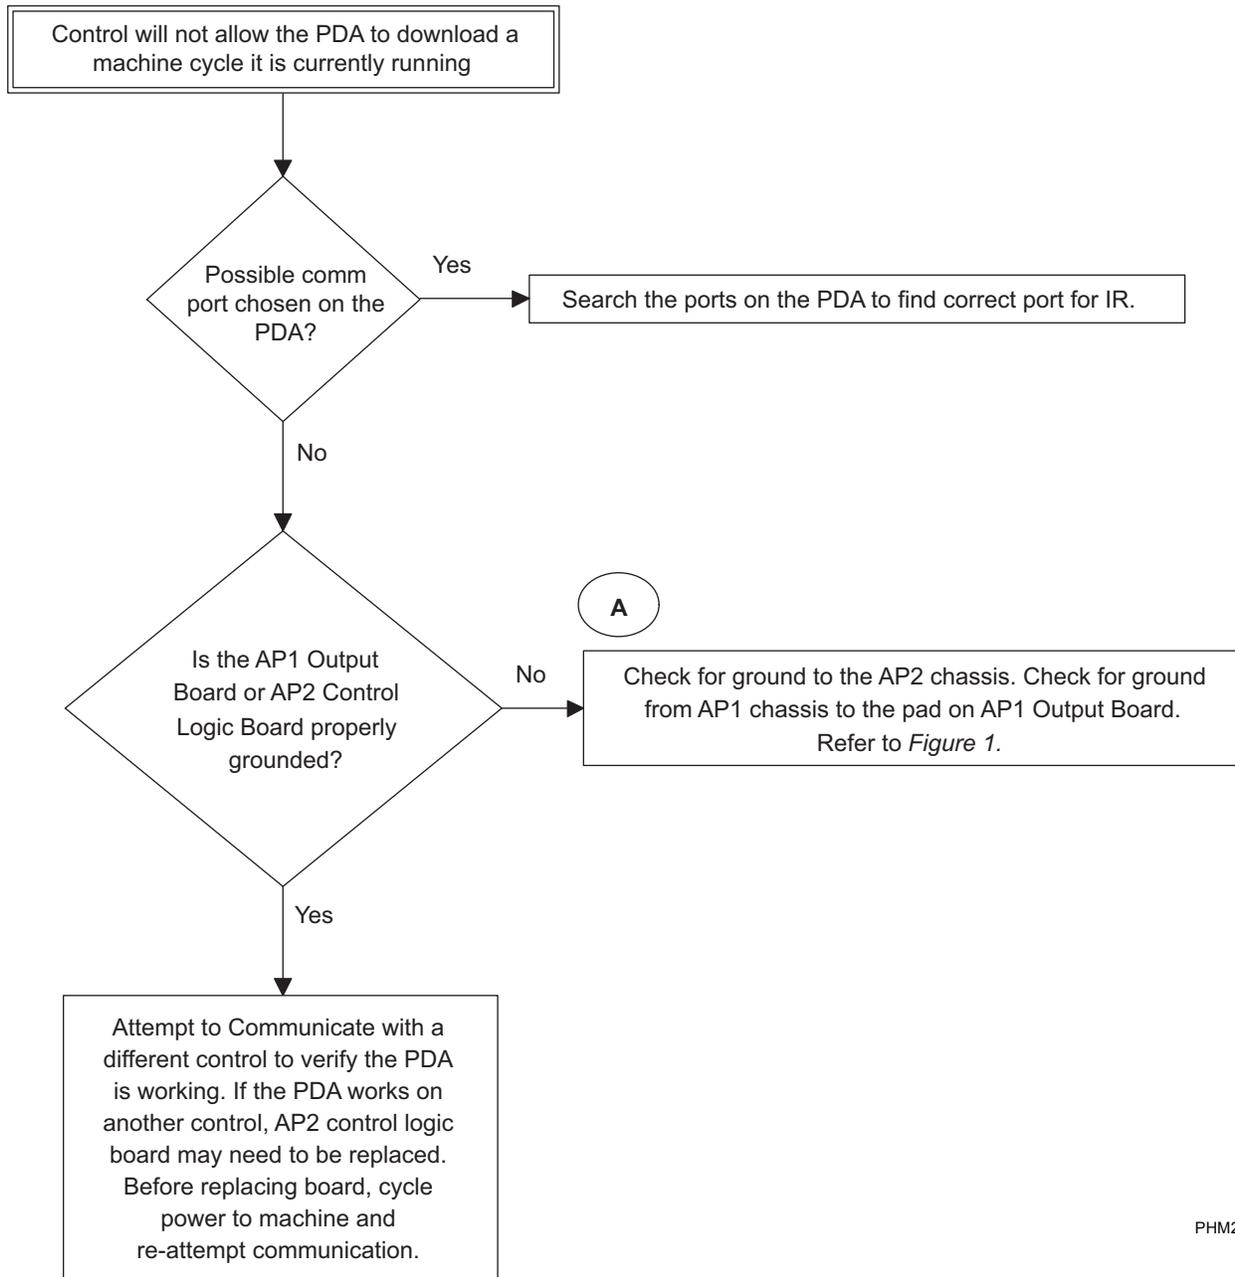

PHM2112S

Control Will Not Allow PDA to Download a Machine Cycle it is Currently Running

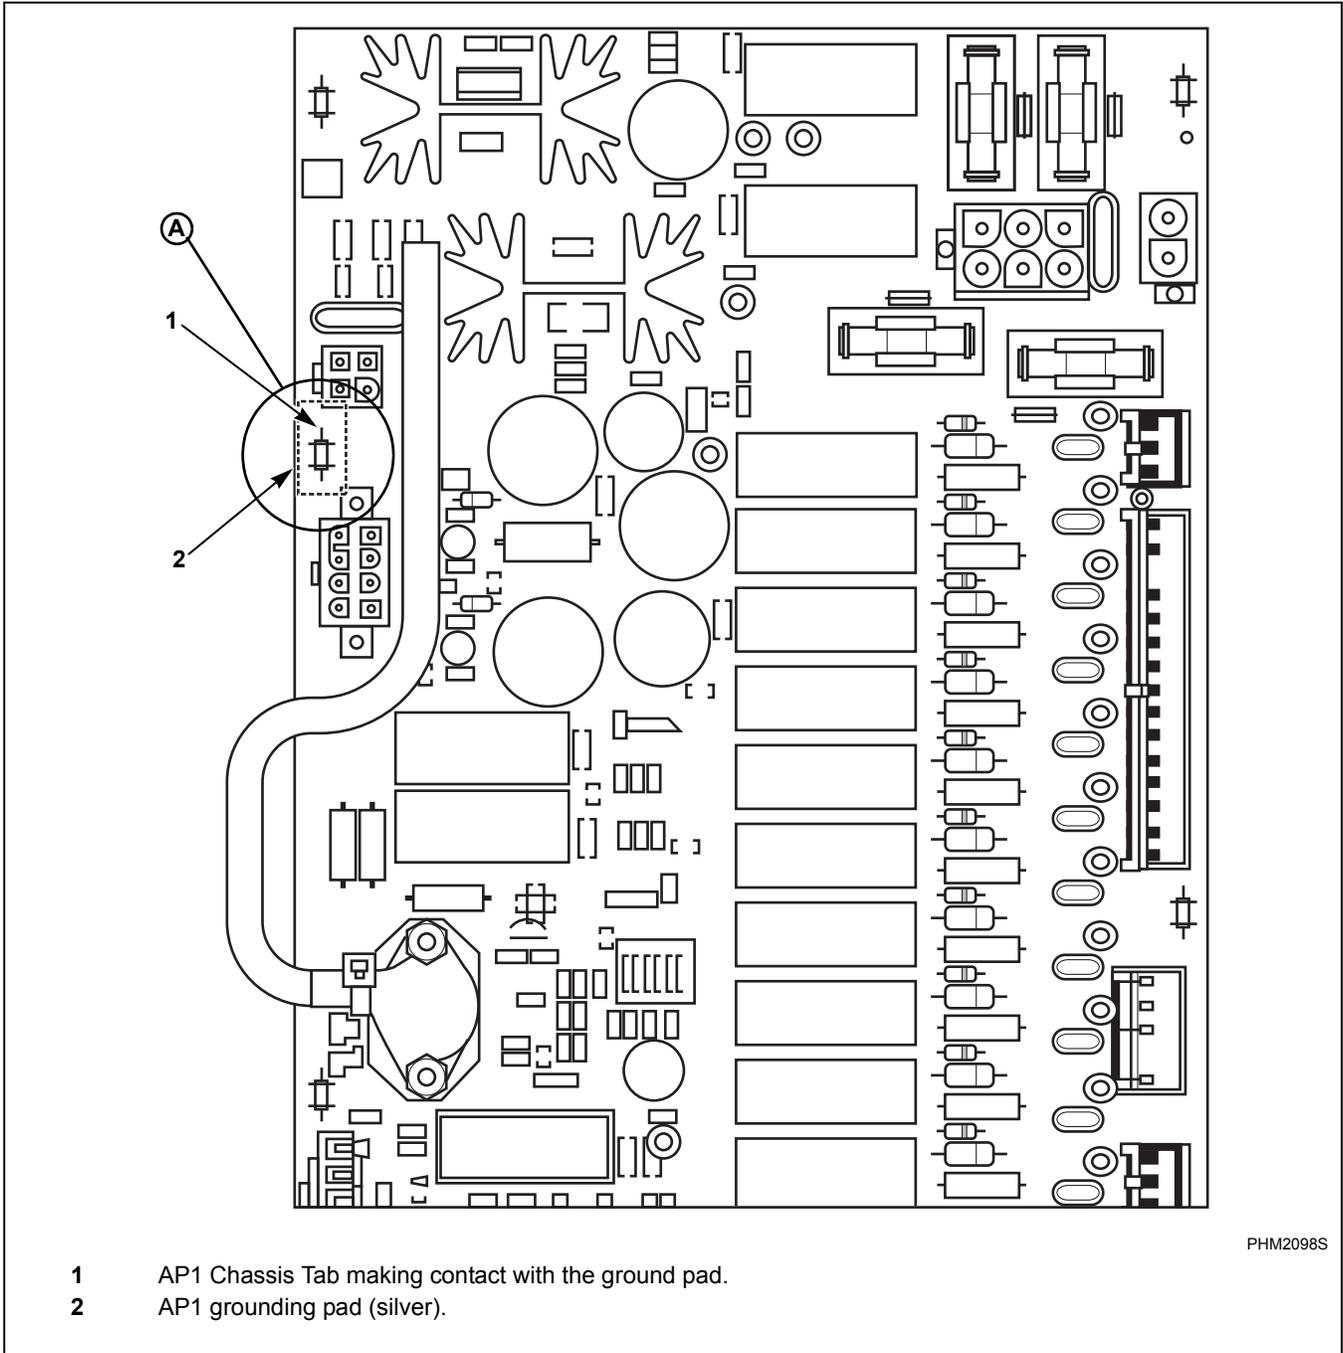


Figure 1