

Maytag MLG23PDFWW 14 - WIRING INFORMATION(ELEC)

Diagnostic Mode:

This mode is normally accessed by pressing the **UPPER DRYER CYCLE** button on the control panel for 1 second while in any of the ready modes. Once through this sequence a diagnostic code is present, or which, **CLAS** displays if operating with Maytag Data Acquisition system.

One step to diagnostic mode the settings display will flash, and specific instructions will be displayed, and diagnostic codes are cleared. If a diagnostic code persists on either of the machines, the fault must be corrected before the following cycle options are permitted.


Procedures to initiate cycle activity from diagnostic mode are as follows:

1. **Upper Dryer Field Diagnostic Cycle** - With the control panel in diagnostic mode, press the **PERMANENT PRESS** key pad. This cycle consists of seven minutes of heat and six minutes of cool down. The **UPPER DRYER** **WHITES & COLORS** key pad will increase the diagnostic cycle minutes up to 120 minutes. The **UPPER DRYER** **DELICATES** key pad will cancel this cycle and exit the diagnostic mode.
2. **Lower Dryer Field Diagnostic Cycle** - With the control panel flashing, this cycle is entered by pressing the **LOWER DRYER**

Diagnostic Codes:

If the set up results in control and one of the diagnostic codes is displayed, the appropriate diagnostic code will be on the display.

- #1 - Upper dryer door sensor error (no contact closed) or due to power line interruption (upper dryer door sensor error) (no contact closed) (diagnostic code is normally cleared).
- #2 - Lower dryer door sensor error (no contact closed) (lower dryer door display disabled) (diagnostic code is normally cleared).
- #3 - Blocked coils (air intake) (diagnostic code is normally cleared).
- #4 - Voltage detected (lower power for 8 seconds) (diagnostic code is normally cleared).
- #5 - Upper dryer motor sensor error (no contact closed) or due to power line interruption (lower dryer cycles and lower dryer display disabled) (diagnostic code is normally cleared).
- #6 - Diagnostic code is normally cleared.
- #7 - Diagnostic code is normally cleared.
- #8 - Diagnostic code is normally cleared.
- #9 - Diagnostic code is normally cleared.
- #10 - Diagnostic code is normally cleared.
- #11 - Diagnostic code is normally cleared.
- #12 - Diagnostic code is normally cleared.
- #13 - Diagnostic code is normally cleared.
- #14 - Lower dryer door sensor error (no contact closed) or due to power line interruption (lower dryer cycles and lower dryer display disabled) (diagnostic code is normally cleared).
- #15 - Diagnostic code is normally cleared.
- #16 - Diagnostic code is normally cleared.
- #17 - Diagnostic code is normally cleared.

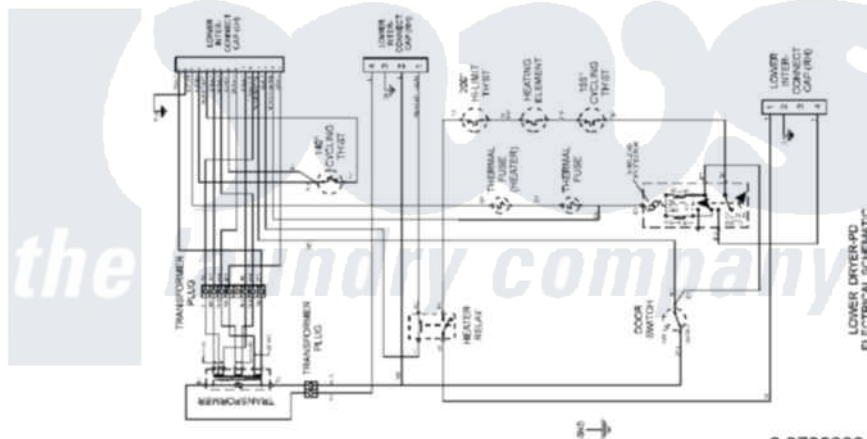

6 3720380

Maytag Commercial Maytag MLG23PDFWW Dryer Parts Parts Diagram 14 - WIRING INFORMATION(ELEC)

Click on the part number to view part

Item	Original Part Number	Replaced By	Status	Part Description
001	NLA		Not Available	WIRING INFORMATION

